



GENESIS®

The Promise of Performance.



PRODUCT CATALOG

An **NPK** Company




CONNECT WITH US



FIND YOUR PRODUCT

Genesis mobile shears, concrete processors, grapples and specialty attachments are available in a wide range of sizes to meet application and excavator requirements. Select a category below or use our Product Finder to view all products.

USE OUR PRODUCT FINDER

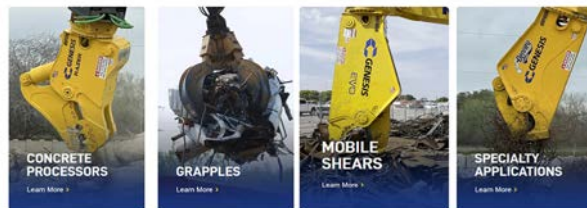

[genesisattachments.com](https://www.genesisattachments.com)



Genesis Attachments

18K followers • 112 following

Industry-leading manufacturer of mobile shears, concrete processors and grapples.
■ Commercial & Industrial Equipment Supplier

Posts About Reels Photos

Intro

Industry-leading manufacturer of mobile shears, concrete processors and grapples.

Page · Commercial & Industrial Equipment Supplier

GENESIS ATTACHMENTS, LLC is responsible for this Page

1000 Genesis Dr, Superior, WI, United States, Wisconsin



facebook.com/genesisattachments



GenesisAttachmentswi

@GenesisAttachmentswi • 4.45K subscribers • 192 videos

Genesis Attachments, an NPK Company, is a global leader in the design and manufacture of high-quality excavator attachments for the scrap processing, demolition, material handling and offshore decommissioning industries.

See LinkedIn and 2 more links

Home Videos Shorts Playlists



youtube.com/genesisattachmentswi

Genesis Attachments
1000 Genesis Drive
Superior, WI 54880 USA

Toll Free: 888-SHEAR-IT
(888-743-2748)
Phone: 715-395-5252

info@genesisattachments.com



Genesis Attachments

Machinery Manufacturing

Superior, WI • 5,606 followers

Industry-leading hydraulic attachments for scrap processing, demolition and material handling.

Follow

About us

Genesis Attachments is a global leader in the design and manufacture of high-quality excavator attachments for the scrap processing, demolition, material handling and offshore decommissioning industries.


linkedin.com/company/genesis-attachments-llc

Genesis Attachments
680 posts 3,143 followers 174 following

Commercial & Industrial Equipment Supplier

A global leader of hydraulic mobile shears, grapples, concrete processors and specialty attachments.

#genesisattachments
#ThePromiseofPerformance
1000 Genesis Drive, Superior, Wisconsin
@genesisattachments.com



instagram.com/genesisattachments

CONTENTS



GXT EVO MOBILE SHEAR PG 4



GXT MOBILE SHEAR PG 6



GSS SUBSEA SHEAR PG 7



GRP REBAR PROCESSOR PG 8



GRB RAIL BREAKER PG 9



GVP VERSI PRO 07 PG 10



GVP VERSI PRO 15 PG 11



GDP DEMOPRO PG 12



GRS REBAR SHEAR PG 13



GLS LINKAGE SHEAR PG 13



M7 CONCRETE CRACKER PG 14



GMP D MECH. PULVERIZER D SERIES PG 15



GRX RAZER X PG 16



LXP® LOGIX PROCESSOR PG 18



GDT RAZER PG 20



GDR DEMOLITION RECYCLER PG 21



GCP CONCRETE PROCESSOR
PG 22



GCC CONCRETE CRACKER
PG 23



GSG SCRAP GRAPPLE
PG 24



GHG HANDLING GRAPPLE
PG 25




GSD SEVERE-DUTY GRAPPLE
PG 26

TECHNICAL SERVICE TRAINING	PG 27
PARTS	PG 28
REBUILD SERVICES & SHEAR JAW ARMOR®	PG 29
MANUFACTURING	PG 30
MULTI-MACHINE MOUNTING OPTIONS	PG 31

EVO

GXT MOBILE SHEAR

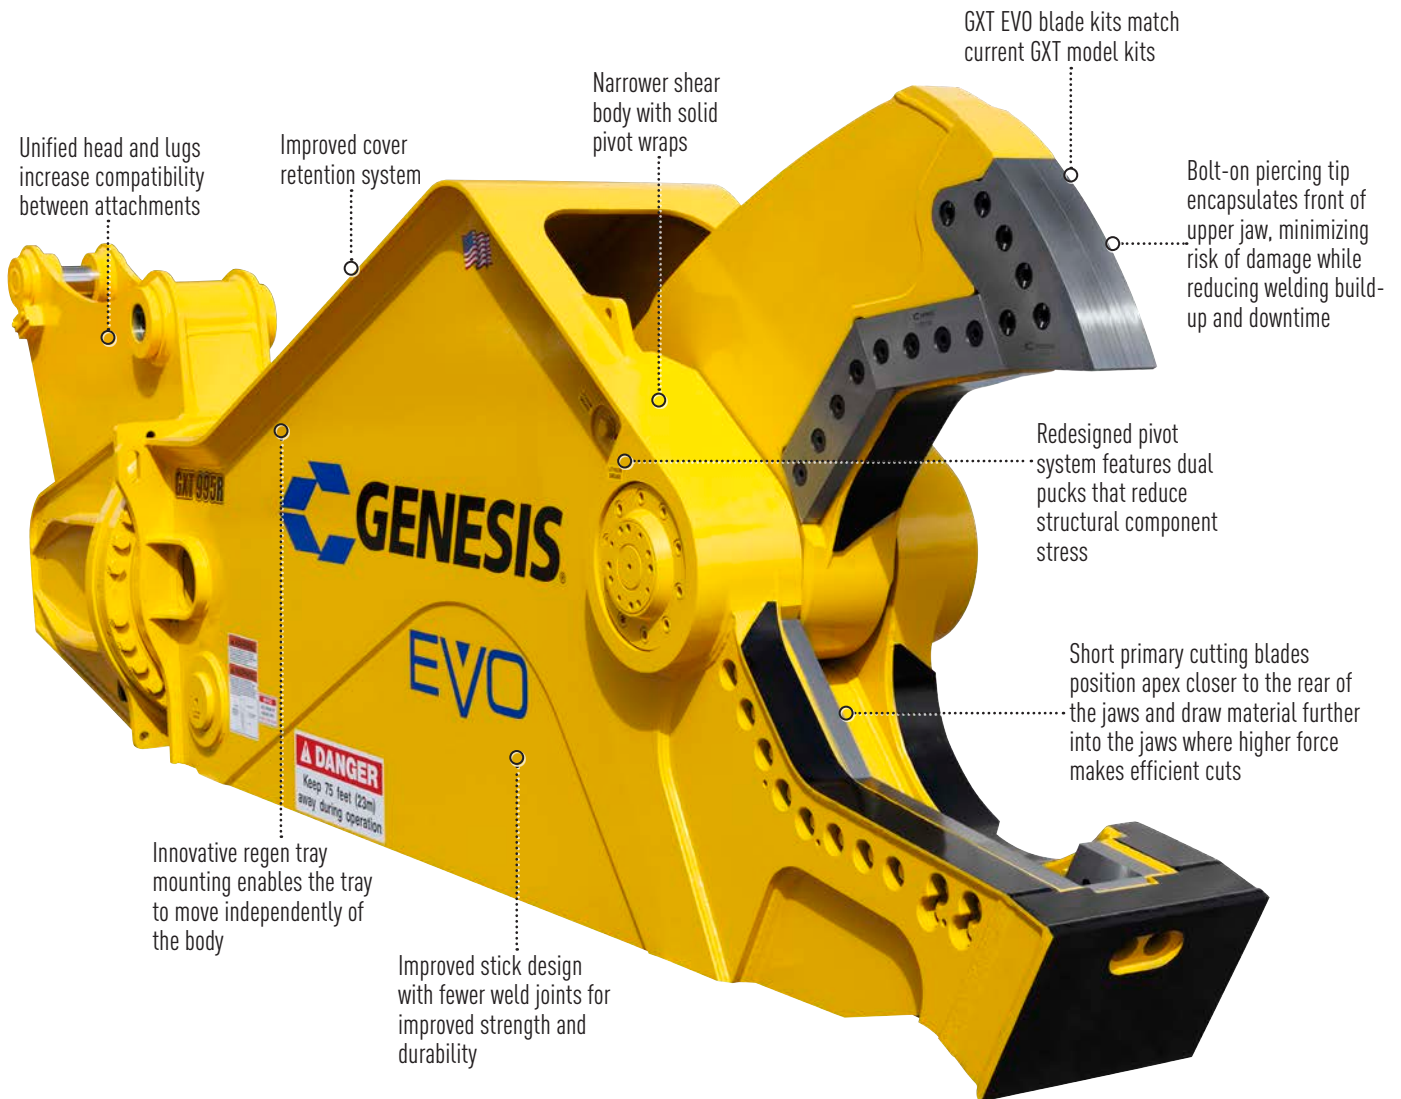

The Ne**XT** E**VO**lution



GXT EVO APPLICATIONS

- ▶ Scrap Processing
- ▶ Demolition

Model	Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Weight	
	(lbs.)	(ins.)	(ins.)	(ft. ins.)	Boom Mount*** (lbs.)	Stick Mount*** (lbs.)
GXT 07R EVO	1,430	12	13	6' 2"	12,000	16,000
GXT 245 EVO	4,500	18	20	5' 11"	25,000	35,000
GXT 245R EVO	5,200	18	20	8' 2"	30,000	45,000
GXT 335 EVO	6,700	23	26	6' 5"	27,000	45,000
GXT 335R EVO	7,500	23	26	8' 11"	37,000	66,000
GXT 445 EVO	10,000	28	28	7' 2"	40,000	75,000
GXT 445R EVO	11,500	28	28	10' 1"	50,000	90,000
GXT 555 EVO	12,000	30	30	8' 0"	50,000	90,000
GXT 555R EVO	13,500	30	30	11' 0"	55,000	110,000
GXT 665 EVO	13,700	32	32	9' 0"	55,000	110,000
GXT 665R EVO	15,200	32	32	12' 0"	68,000	120,000
GXT 775 EVO	15,750	36	37	9' 8"	68,000	135,000
GXT 775R EVO	17,900	36	37	13' 0"	79,000	150,000
GXT 775 HD EVO	18,000	33	37	9' 8"	79,000	170,000
GXT 775R HD EVO	20,000	33	37	13' 0"	100,000	180,000
GXT 995 EVO	19,400	39	42	10' 8"	90,000	170,000
GXT 995R EVO	21,400	39	42	14' 2"	100,000	180,000
GXT 1555 EVO	25,000	43	46	12' 1"	110,000	190,000
GXT 1555R EVO	28,800	43	46	15' 8"	145,000	250,000

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.

***2nd-member installations that are at or near minimum excavator weight and all 3rd-member installations require pre-approval from Genesis.

GXT

MOBILE SHEAR



GXT APPLICATIONS

- ▶ Scrap Processing
- ▶ Demolition

Model	Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Weight	
	(lbs.)	(ins.)	(ins.)	(ft. ins.)	Boom Mount*** (lbs.)	Stick Mount*** (lbs.)
GXT 115****	3,100	16	18	5' 0"	15,000	25,000
GXT 115R****	3,550	16	18	7' 8"	18,000	30,000
GXT 225	4,200	18	20	5' 8"	25,000	35,000
GXT 225R	4,900	18	20	7' 11"	30,000	45,000
GXT 335	6,500	23	26	6' 5"	27,000	45,000
GXT 335R	7,300	23	26	8' 11"	37,000	66,000
GXT 445	9,500	28	28	7' 2"	40,000	75,000
GXT 445R	11,000	28	28	10' 1"	48,000	90,000
GXT 555	11,600	30	30	8' 0"	50,000	90,000
GXT 555R	13,100	30	30	11' 0"	55,000	110,000
GXT 665	13,200	32	32	9' 0"	55,000	110,000
GXT 665R	14,700	32	32	12' 0"	68,000	120,000
GXT 775	15,500	35	37	9' 8"	68,000	135,000
GXT 775R	17,750	35	37	13' 0"	79,000	150,000
GXT 995	18,000	39	42	10' 8"	79,000	170,000
GXT 995R	20,000	39	42	14' 2"	100,000	180,000
GXT 1555	23,000	44	46	13' 5"	110,000	190,000
GXT 1555R	26,750	44	46	17' 2"	145,000	250,000
GXT 2055	32,000	48	50	14' 5"	145,000	Contact Factory
GXT 2055R	36,200	48	50	17' 7"	180,000	Contact Factory
GXT 2555	50,500	54	56	15' 5"	Contact Factory	Contact Factory
GXT 2555R	56,500	54	56	21' 5"	Contact Factory	Contact Factory

*Weight includes mounting bracket to attach to excavator.


**Distance is measured from the attachment mounting pivot (boom or stick) forward.

***2nd-member installations that are at or near minimum excavator weight and all 3rd-member installations require pre-approval from Genesis.

****The GXT 115 and GXT 115R have a single guide blade.

GSS

SUBSEA SHEAR

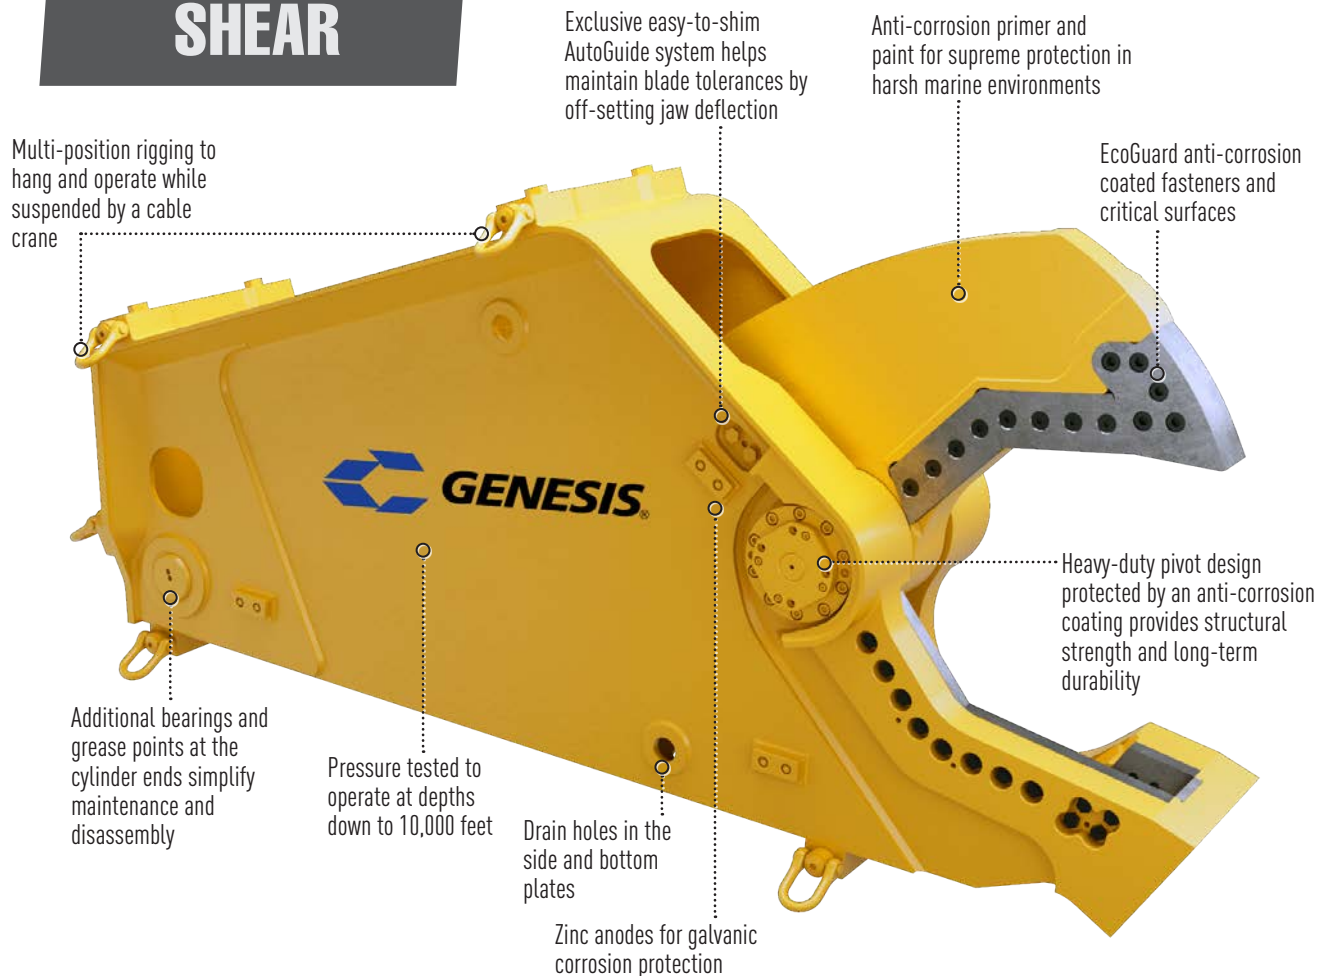


GSS APPLICATIONS

- ▶ Offshore Platform Decommissioning
- ▶ Offshore Pipeline and Piling Cutting
- ▶ Underwater Steel Cutting
- ▶ Cable Hung — Operated by Subsea Power Pack or from Surface Power

Model	Weight	Jaw Opening	Jaw Depth
	(lbs.)	(ins.)	(ins.)
GSS 665	12,300	32	32
GSS 775	14,700	35	37
GSS 1555	22,800	44	46
GSS 2555	46,000	54	56

GRP

REBAR PROCESSOR

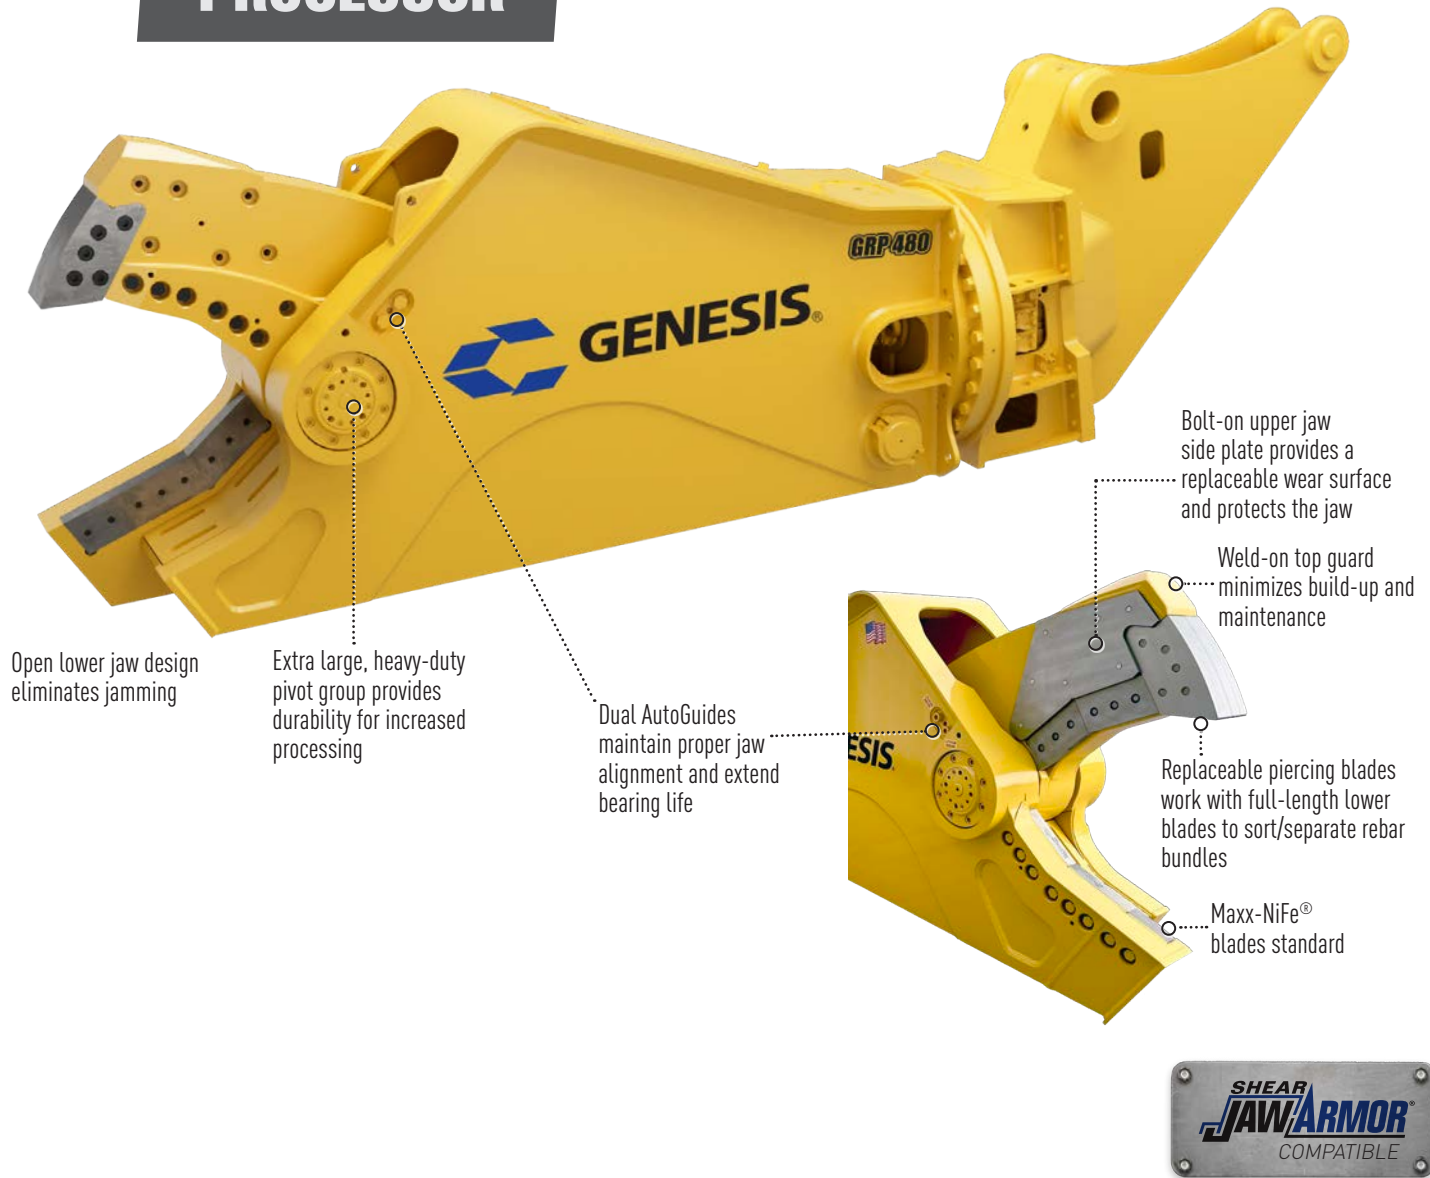

GRP APPLICATIONS

- Rebar Processing


Model	Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Weight	
	(lbs.)	(ins.)	(ins.)	(ft. ins.)	Boom Mount (lbs.)	Stick Mount (lbs.)
GRP 480	11,900	24	26	10' 1"	48,000	90,000

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.

GRB

RAIL BREAKER

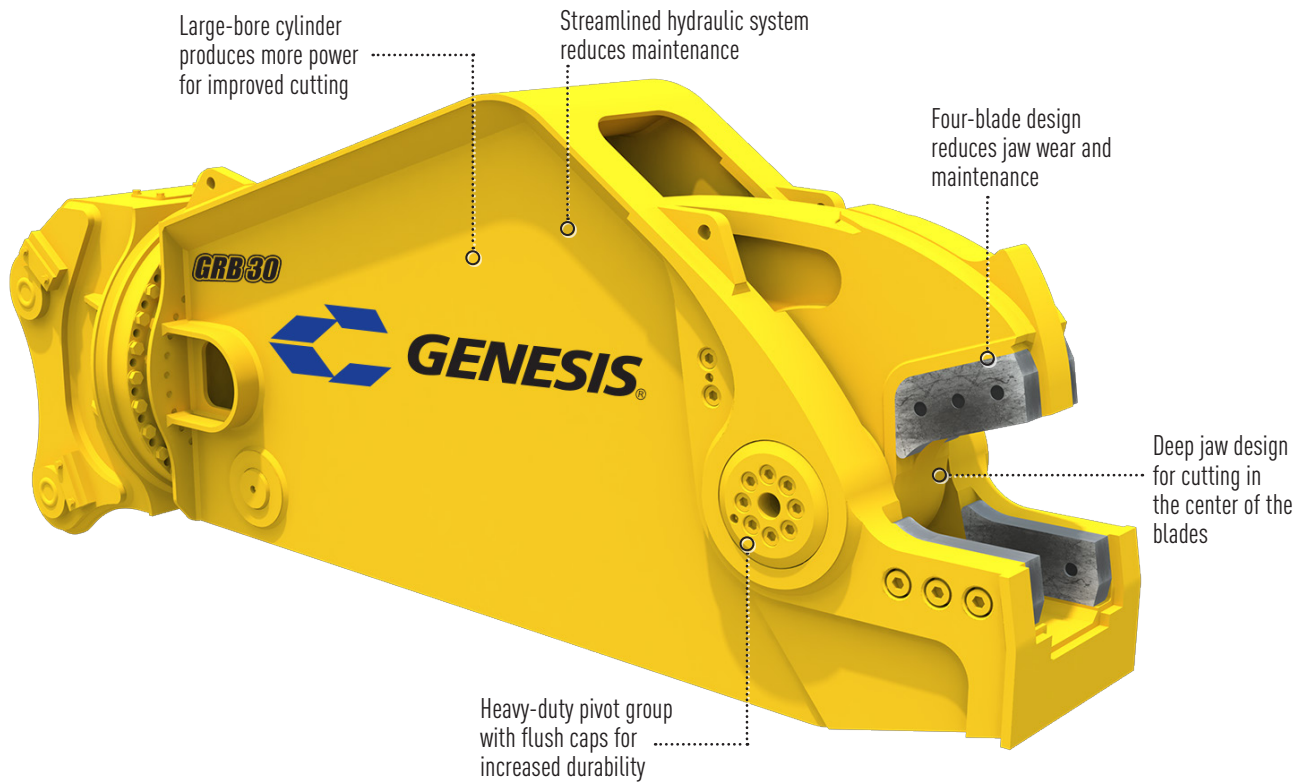

GRB APPLICATIONS

- Rail Processing
– 136 lb. and smaller low chrome

Model	Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Weight	
	(lbs.)	(ins.)	(ins.)	(ft. in.)	Boom Mount (lbs.)	Stick Mount (lbs.)
GRB 30	6,900	9.75	13.25	9' 2"	40,000	55,000

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.

GVP

VERSI PRO 07



Each jaw's pivot group stays intact, allowing the use of a press-fit pin design for a stronger, more durable product and making jaw change-outs safe, easy and fast

Innovative bracket system accommodates a skid steer quick plate or a mini excavator lug plate change-over in 10 minutes

360° rotation comes standard with every Versi Pro

Available with full hydraulic or electric over hydraulic. Electric over hydraulic allows for jaw open or close and rotation with one hydraulic circuit.

Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems

Jaw change-outs in 10 minutes with the coupler-style connection system



SHEAR JAW

- ▶ Patented pivot geometry creates peak power for piercing and cutting
- ▶ Weld-on wear plate and piercing tip
- ▶ Four-way indexable guide blades and primary blades provide four useable cutting edges



CRACKER JAW

- ▶ Patented pivot geometry creates peak power when jaws are fully open, where it's most needed to crush concrete
- ▶ Open relief design allows concrete to pass through lower jaw



GRAPPLE JAW

- ▶ Recessed welds are protected from wear, increasing grapple life
- ▶ Boxed-tine construction creates a very high strength and lightweight grapple—each tine will withstand the full breakout force of the carrier
- ▶ Replaceable tine tips are abrasion-resistant
- ▶ Inside radius matches that of a 55-gallon barrel



WIRE CUTTER JAW

- ▶ Designed for non-ferrous wire only
- ▶ Bolt-on interchangeable cutting blades can be sharpened and are easily replaced
- ▶ Curved jaw design gathers material deeper into the jaw for maximum cutting power
- ▶ Unique self-tensioning pivot group maintains optimal blade clearance



Skid Steer Bracket

Mounting bracket option for skid steers features a traction grip to provide safe entry and exit for the operator

Jaws	Weight*	Jaw Opening	Jaw Depth	Reach** w/Jaws Installed	Minimum Excavator Weight		Minimum Skid Steer Weight
	(lbs.)	(ins.)	(ins.)	(ft. ins.)	Boom Mount (lbs.)	Stick Mount (lbs.)	(lbs.)
Shear	1,375	11.5	11.5	5' 6"	12,000	16,000	7,000
Cracker	1,385	14.5	13	5' 8"			
Grapple	1,420	32	15.5	5' 11"			
Wire Cutter	1,245	10.5	11.5	5' 9"			

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.

The stability of each lift class varies between OEM skid steer and mini excavator models. Please consult with your Genesis salesperson for recommended carrier models. Joystick control packages are available for carriers less equipped.

GVP 07 APPLICATIONS

- ▶ Interior Demolition
- ▶ Scrap Processing
- ▶ On-site Material Processing and Handling

GVP

VERSI PRO 15


Patented pivot system provides a power curve to match each jaw set's primary application

Each jaw's pivot group stays intact, allowing the use of a press-fit pin design for a stronger, more durable product and making jaw change-outs safe, easy and fast

Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems

360° rotation comes standard with every Versi Pro

Jaw change-outs in 10 minutes with the coupler-style connection system

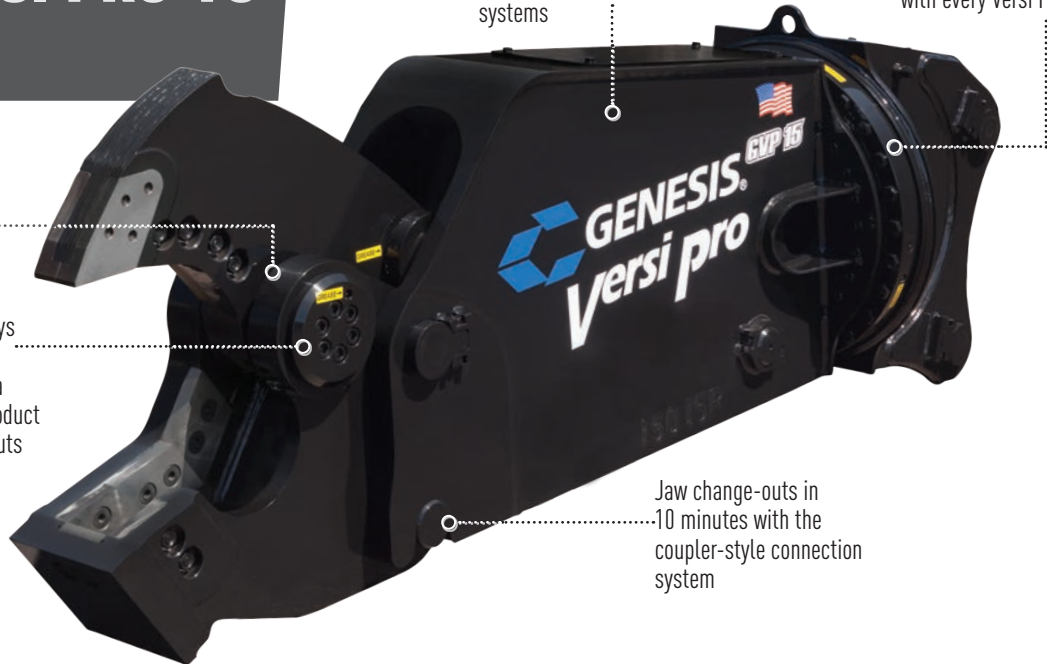

SHEAR JAW

- ▶ Patented bolt-on piercing tip is replaced in minutes without grinding or welding
- ▶ Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges
- ▶ Exclusive dual guide blade system accommodates heat expansion at the tip while maintaining tighter tolerances where the primary cutting blades pass



CRACKER JAW

- ▶ Offset teeth rows maximize the ability to downsize material
- ▶ Patented pivot geometry creates peak power when jaws are near wide open, where it's most needed to crush concrete

GVP 15 APPLICATIONS

SHEAR JAW

- ▶ Scrap Processing
- ▶ Demolition
- ▶ Rebar
- ▶ Wire
- ▶ Tires
- ▶ Many Types of Non-ferrous

CRACKER JAW

- ▶ Demolition
- ▶ Concrete Recycling
- ▶ C & D Processing

Jaws	Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Weight	
	(lbs.)	(ins.)	(ins.)	(ft. ins.)	Boom Mount (lbs.)	Stick Mount (lbs.)
Shear	3,200	16	15	7' 5"	18,000	28,000
Cracker	3,200	25	25	8' 3"		

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward. The stability of each lift class varies between OEM excavator models. Please consult with your Genesis salesperson for recommended carrier models.

GDP

DEMOPro



GDP APPLICATIONS

- ▶ Demolition
- ▶ Bridge Dismantling and Processing
- ▶ Concrete Recycling

Model	Weight*	Jaw Opening		Jaw Depth	Reach**	Minimum Excavator Weight
	(lbs.)	Steel (ins.)	Concrete (ins.)	(ins.)	(ft. ins.)	Stick Mount (lbs.)
GDP 655	7,500	36	33	26	10' 4"	66,000

*Weight includes mounting bracket to attach to excavator.


**Distance is measured from the attachment mounting pivot (boom or stick) forward.

GRS

REBAR SHEAR

GLS

LINKAGE SHEAR

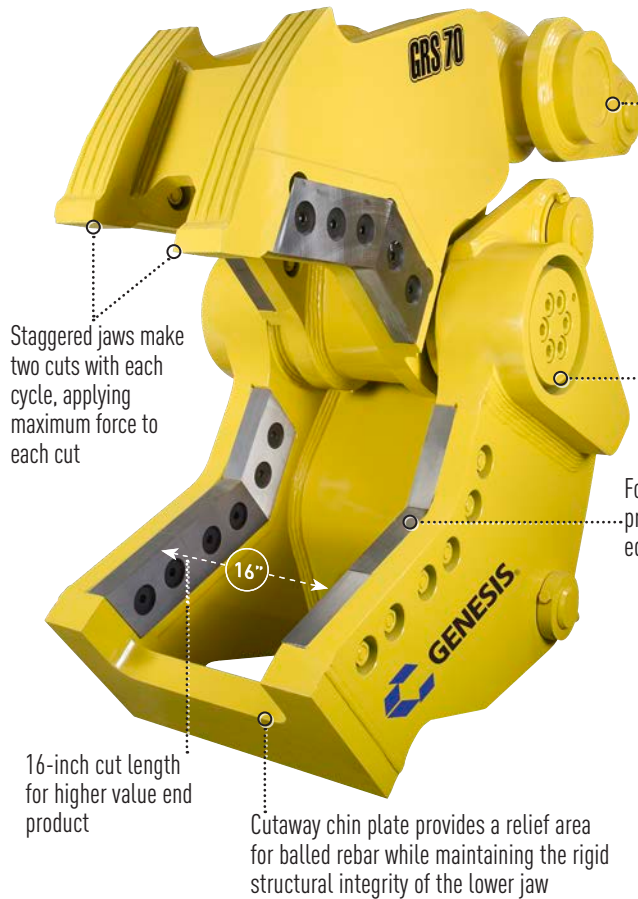

Rhino horn designed to aid in positioning material for processing


Common pivot group and pinning points accommodate the GRS and GLS with one stiff arm—the mounting pad remains in place

Patented bolt-on piercing tip is replaced in minutes without grinding or welding

Shrouded heavy-duty pivot design provides structural strength and long-term durability

Four-way indexable blades provide four useable cutting edges

Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges

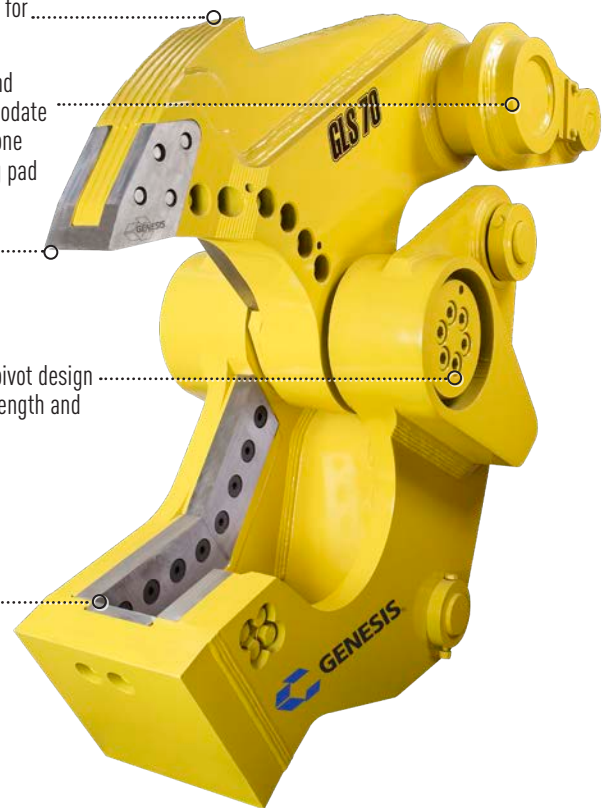

POWER Series

GRS & GLS APPLICATIONS

- ▶ Scrap Processing
- ▶ Demolition
- ▶ C & D Processing
- ▶ Concrete Recycling

STIFF ARM AND MOUNTING PAD

Comes standard with each GRS and GLS



Model	Weight* (lbs.)	Jaw Opening** (ins.)	Jaw Depth (ins.)	Excavator Weight (lbs.)
GRS 70	6,098	26	27	65,000 - 80,000
GRS 90	6,718	30	30	80,000 - 110,000

*Weight includes mounting bracket and stiff arm.

**Jaw opening varies slightly depending on excavator mounting location. Genesis linkage attachments are not compatible with quick couplers. Contact Genesis for more information.

Model	Weight* (lbs.)	Jaw Opening** (ins.)	Jaw Depth (ins.)	Excavator Weight (lbs.)
GLS 50	4,100	21	21	40,000 - 60,000
GLS 70	4,696	24	24	60,000 - 80,000
GLS 90	5,313	27	27	80,000 - 110,000

*Weight includes mounting bracket and stiff arm.

**Jaw opening varies slightly depending on excavator mounting location. Genesis linkage attachments are not compatible with quick couplers. Contact Genesis for more information.

M7

CONCRETE CRACKER

Available with knock-around rotation
or hydraulic rotation

– Knock-around rotation has
adjustable brake and position locks

Hydraulic booster for
increased power and speed

Fully guarded cylinder rod

Large access panels

Solid Strenx® 900 steel jaws

Replaceable concrete
teeth and blades

M7 APPLICATIONS

- ▶ Concrete Recycling
- ▶ Demolition

Model	Weight (lbs.)	Jaw Opening (ins.)	Jaw Depth (ins.)	Brokk® Model	Carrier Weight	
					Boom Mount (lbs.)	Stick Mount (lbs.)
M7	1,400	27	19	400, 500, 520	12,000 – 19,000	16,000 – 25,000

Strenx® is a trademark of the SSAB group of companies.

Brokk® is a trademark of Brokk Global and Lifco Group.



Maintenance and transport stand included

GMP D

MECHANICAL PULVERIZER D SERIES

GMP 50D / 70D

BOLT-IN TEETH JAW CONFIGURATION


Bolt-in teeth are easily replaced in the field for minimal downtime and can be rotated front to back for longer life



GMP 50D / 70D

WELD-IN TEETH JAW CONFIGURATION

Weld-in teeth can be rebuilt in place for extended life

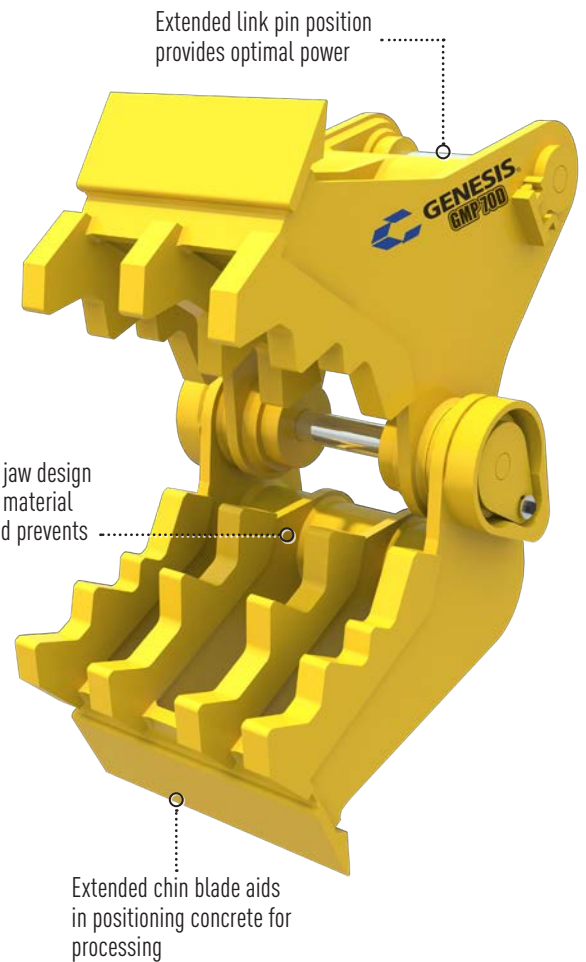

GMP D APPLICATIONS

- ▶ Demolition
- ▶ C & D Processing
- ▶ Concrete Recycling

Model	Weight*	Jaw Opening**	Jaw Depth	Moving Jaw Width	Fixed Jaw Width	Tooth Config.	Excavator Weight
	(lbs.)	(ins.)	(ins.)	(ins.)	(ins.)		(lbs.)
GMP 50D	4,650	36	25	24	32	3/4	40,000 - 60,000
GMP 70D	5,050	40	29	26.5	34	3/4	60,000 - 80,000
GMP 90D	6,400	44	32.5	32.5	40	4/5	80,000 - 110,000

*Weight includes mounting bracket and stiff arm.

**Jaw opening varies slightly depending on excavator mounting location.



STIFF ARM AND MOUNTING PAD

Comes standard with each GMP D

GRX

RAZER X MULTI-JAW DEMOLITION TOOL

CRACKER JAW

Reversible, long-life crushing teeth are quickly and easily replaced, eliminating build-up


4-way indexable cutting blades feature an apex that draws material deeper into the jaw for more efficient cutting

Easy-to-change crushing teeth are available in several configurations to maximize performance in any application

Heavy-duty pivot design is integral to the jaw set, providing a power curve to match the jaw's primary application

Reverse-mounted cylinder protects the rod from debris

Short, flat-top head with bolt-on bracket shortens the center of gravity, making it easy to change mounting for different carriers

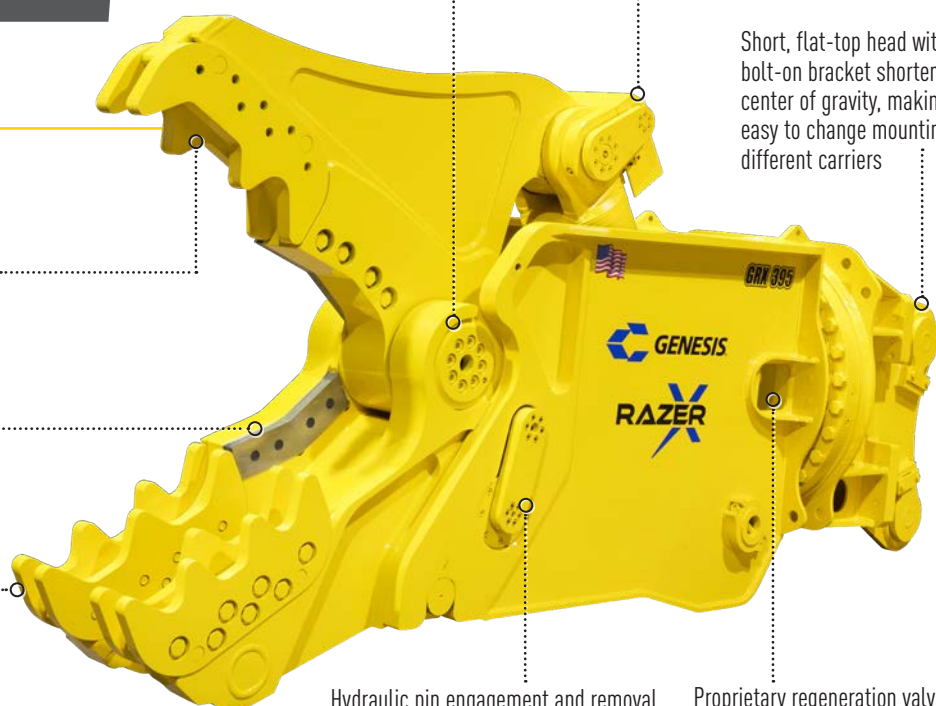

Hydraulic pin engagement and removal for jaw change-outs in less than 2 minutes without leaving the cab

Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems


SHEAR JAW

Weld-on, replaceable, highly abrasion-resistant steel rhino horn protects front of upper jaw, reducing maintenance

Bolt-on piercing tip encapsulates front of upper jaw, minimizing risk of damage and reducing maintenance

Dual guide blade length matches piercing tip length so blades can be shimmed independently to accommodate piercing tip wear



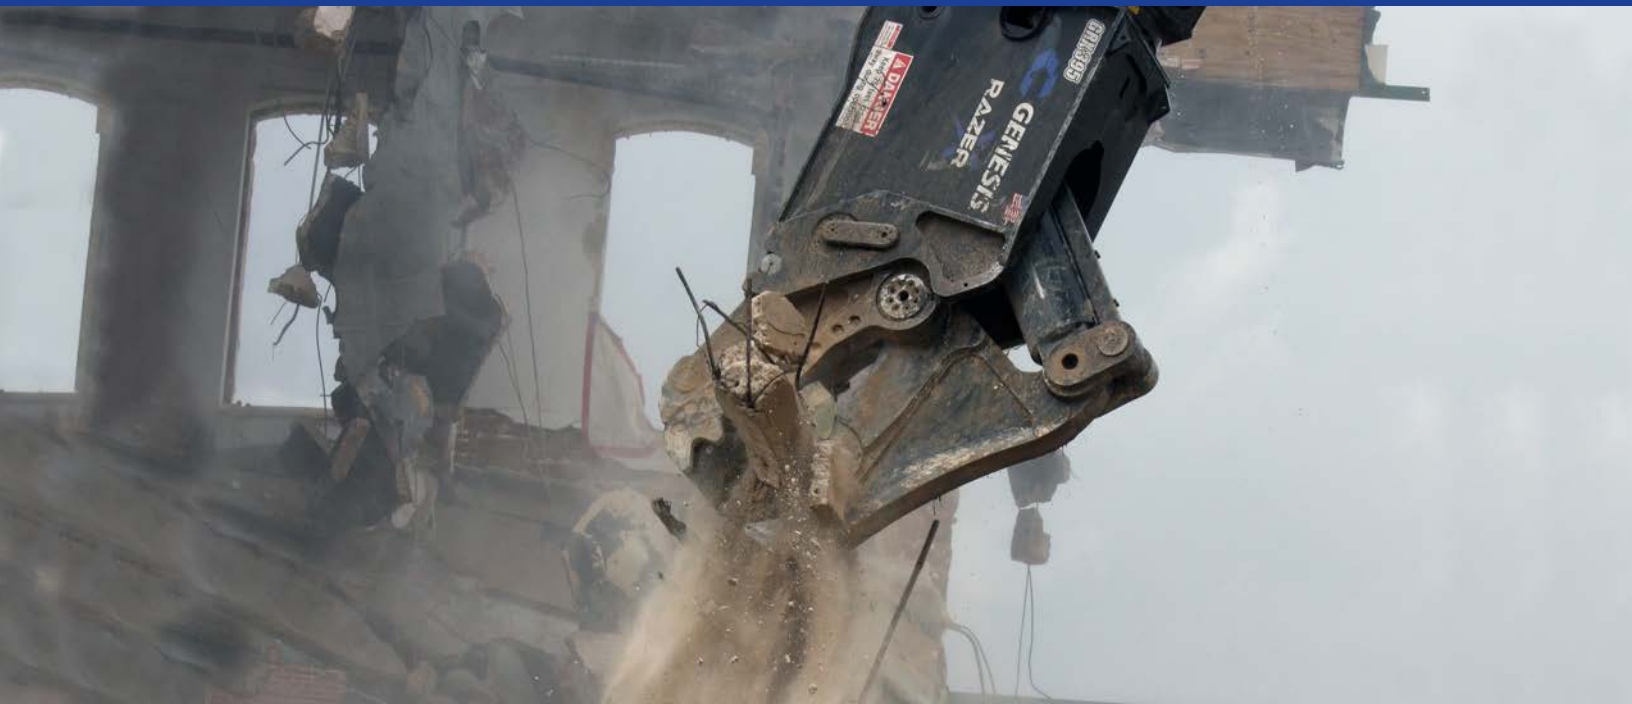

SHEAR JAW STAND

Jaw stands are specific to each jaw set, providing correct positioning for efficient change-outs

PULVERIZER JAW

Extended wear plates aid in positioning concrete for processing

Indexable blades provide two usable edges

Reversible, long-life crushing teeth are quickly and easily replaced, eliminating build-up



GRX APPLICATIONS

- ▶ Concrete Recycling
- ▶ C & D Processing
- ▶ Bridge Demolition
- ▶ Wire
- ▶ Copper
- ▶ Structural Steel
- ▶ Demolition
- ▶ Rebar
- ▶ Aluminum

Model	Jaw	Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Wt.
		(lbs.)	(ins.)	(ins.)		Stick Mount (lbs.)
GRX 195	Cracker	5,500	30	30	8' 9"	45,000
	Shear	5,200	18	18		
	Pulverizer	5,500	29	26		
GRX 295	Cracker	7,100	38	32	9' 4"	66,000
	Shear	6,900	20	20		
	Pulverizer	7,300	38	30		
GRX 395	Cracker	10,750	45	42	10' 6"	90,000
	Shear	10,500	24	25.5		
	Pulverizer	11,000	45	36		

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.



LXP[®]

LOGIX PROCESSOR

Patented pivot system provides a power curve to match the jaw's primary application:

- peak power at pierce for shear jaw
- peak power at fully open for cracker and pulverizer jaws

Each jaw's pivot group stays intact, allowing the use of a press fit design for a stronger, more durable product

Reverse-mounted cylinders protect the rods from debris


Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems

SHEAR JAW

Patented bolt-on piercing tip is replaced in minutes without grinding or welding

Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges

Exclusive dual guide blade system accommodates heat expansion at the tip while maintaining tighter tolerances where the primary cutting blades pass (300 - 800 models only)

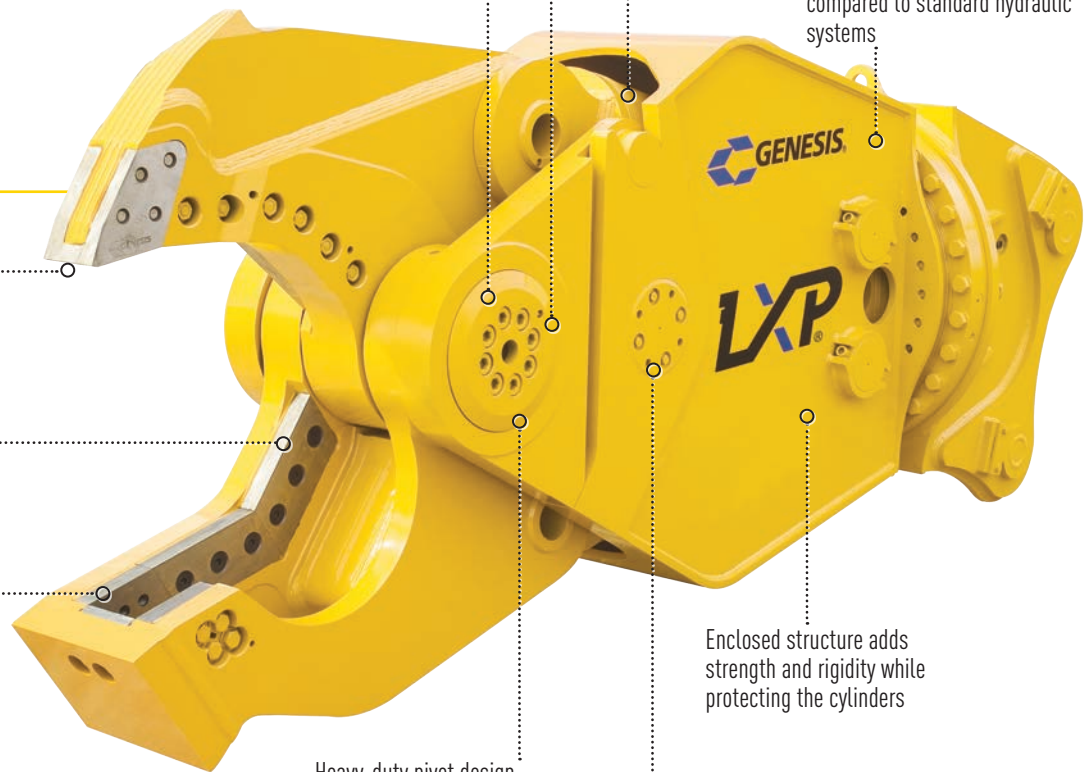

Heavy-duty pivot design with recessed caps provides structural strength and long-term durability

Enclosed structure adds strength and rigidity while protecting the cylinders

Jaw change-outs in 15 minutes with the coupler style connection system, hydraulically activated lock pin, jaws that stay intact and a stand with every jaw set – safe, easy and fast




JAW STANDS

LXP 200 & 300: 680 lbs.
LXP 400 & 500: 780 lbs.
LXP 800: 1,100 lbs.

CRACKER JAW 200-500

Indexable blades provide two useable cutting edges

Teeth are easy to change and fully protect the parent material, eliminating the need for build-up and hard-surfacing (200-500 models only)

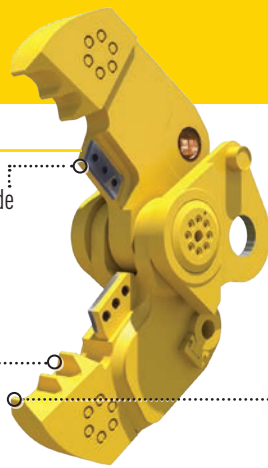


Bolt-on teeth and blades reduce maintenance and downtime (800 model only)

Cracker tips concentrate force for a greater ability to crush through heavy concrete


CRACKER JAW 800

Indexable blades provide two useable cutting edges

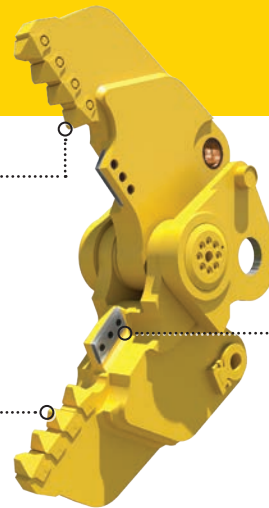

PULVERIZER JAW 200-500

Bolt-on tooth bed features a fully replaceable crushing surface, eliminating the need for welding (200-500 models only)

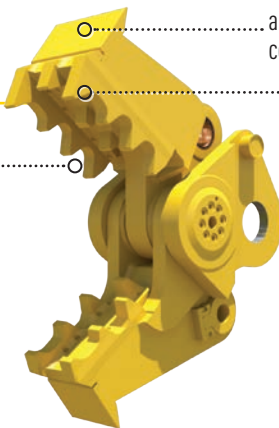


Extended wear plates aid in positioning concrete for processing

Tips concentrate force for a greater ability to crush through heavy concrete

PULVERIZER JAW 800

Bolt-on teeth reduce maintenance and downtime (800 model only)

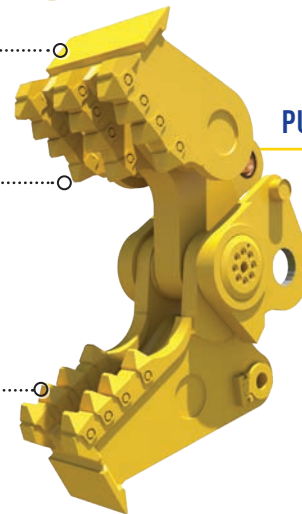

LXP® APPLICATIONS

SHEAR JAW

- ▶ Demolition
- ▶ Bridge Demolition
- ▶ Structural Steel
- ▶ Rebar
- ▶ Wire
- ▶ Aluminum
- ▶ Copper

CRACKER JAW

- ▶ Concrete Recycling
- ▶ C & D Processing
- ▶ Rebar
- ▶ Demolition

PULVERIZER JAW

- ▶ Demolition
- ▶ Concrete Recycling
- ▶ C & D Processing
- ▶ Rebar

Model		Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Weight	
		(lbs.)	(ins.)	(ins.)		Boom Mount (lbs.)	Stick Mount (lbs.)
LXP 200	Shear	5,370	17	19	8' 0"	20,000	45,000
	Pulverizer	5,670	29	24			
	Cracker	5,650	38	28			
LXP 300	Shear	7,600	22	24	8' 6"	45,000	70,000
	Pulverizer	7,270	35	26			
	Cracker	7,560	43	30			
LXP 400	Shear	11,065	24	27	9' 6"	60,000	100,000
	Pulverizer	11,255	38	30			
	Cracker	11,145	47	33.5			
LXP 500	Shear	12,905	27	28	9' 11"	70,000	120,000
	Pulverizer	12,205	43	31			
	Cracker	12,715	51	34.5			
LXP 800	Shear	17,500	40	35	11' 8"	90,000	150,000
	Pulverizer	17,720	61	39			
	Cracker	17,600	71	50			

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.



GDT

RAZER DEMOLITION TOOL

Reversible, long-life crushing teeth are quickly and easily replaced, eliminating build-up

4-way indexable cutting blades feature an apex that draws material deeper into the jaw for more efficient cutting

Open lower jaw allows material being processed to easily pass through, preventing jamming

Easy-to-change crushing teeth are available in several configurations to maximize performance in any application

Cylinder is reverse-mounted to protect from debris

Short, flat-top head with bolt-on bracket shortens the center of gravity while making it easy to change mounting for different carriers



GDT APPLICATIONS

- ▶ High-Reach Demolition
- ▶ Concrete Recycling
- ▶ C & D Processing
- ▶ Bridge Demolition
- ▶ Wire
- ▶ Copper
- ▶ Structural Steel
- ▶ Demolition
- ▶ Rebar
- ▶ Aluminum

Model	Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Wt.
	(lbs.)	(ins.)	(ins.)	(ft. ins.)	Stick Mount (lbs.)
GDT 190	4,900	31	33	8' 0"	45,000
GDT 290	7,000	39	42	9' 2"	66,000
GDT 390	10,000	46	45	10' 6"	90,000
GDT 590	15,100	52	46.5	12' 4"	120,000
GDT 890	20,000	64	62	13' 10"	180,000

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.

GDR

DEMOLITION RECYCLER

300/400 CRACKER JAW CONFIGURATION

Weld-on tooth and blade pockets greatly improve the ability to maintain the jaws, extending the GDR's useful life

Indexable blades provide two useable cutting edges


Bolt-on teeth and blades reduce maintenance time

Extended chin aids in positioning concrete for processing

Extended upper plate aids in positioning concrete for processing

Reverse-mounted cylinder protects cylinder rod from debris

360° rotation comes standard with every GDR

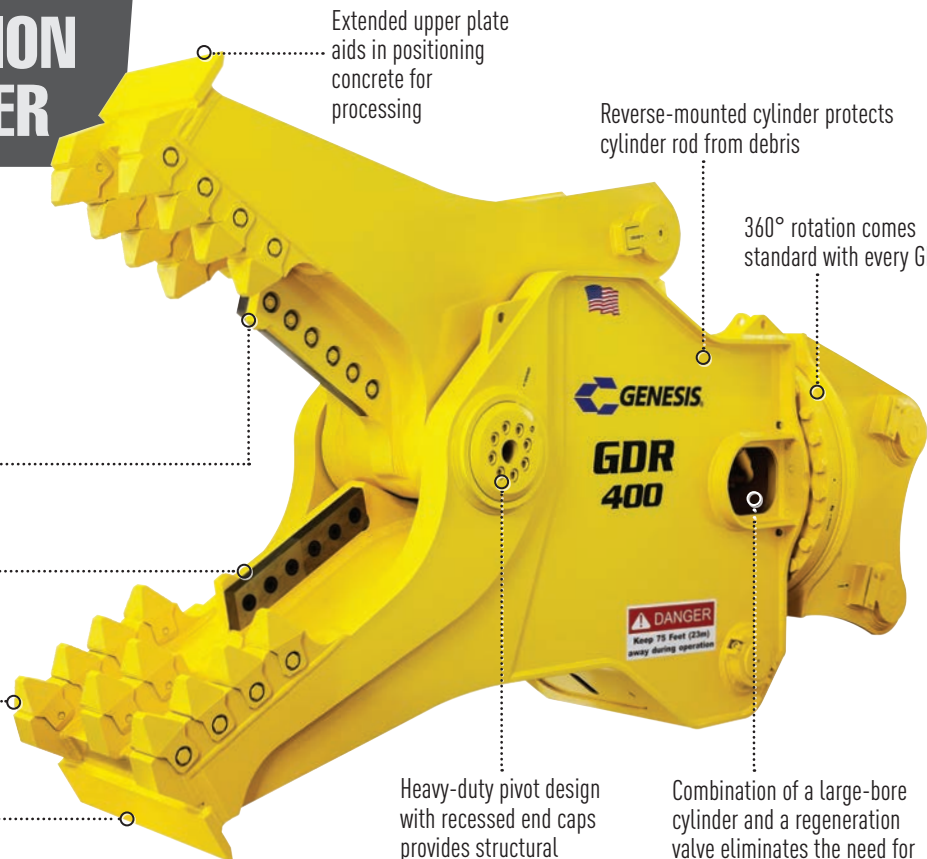

Heavy-duty pivot design with recessed end caps provides structural strength and long-term durability

Combination of a large-bore cylinder and a regeneration valve eliminates the need for an intensifier and a complex hydraulic system


JAW CONFIGURATIONS



Pulverizer
150 & 200 models



Pulverizer
300 & 400 models



Cracker
150 & 200 models



Shear
150, 200 & 300 models only

GDR APPLICATIONS

- ▶ Concrete Recycling
- ▶ Bridge Demolition
- ▶ C & D Processing
- ▶ Structural Steel
- ▶ Demolition
- ▶ Rebar
- ▶ Wire
- ▶ Aluminum
- ▶ Copper

Model	Weight* (lbs.)	Jaw Opening (ins.)	Jaw Depth (ins.)	Reach** (ft. ins.)	Minimum Excavator Wt. Stick Mount (lbs.)
GDR 150	3,450	26	25	6' 4"	28,000
GDR 200	5,500	35	32	7' 7"	45,000
GDR 300	7,900	43	39	8' 9"	70,000
GDR 400	11,000	48	41	9' 10"	100,000

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.

GCP

CONCRETE PROCESSOR

Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems

Bolt-on rebar cutting blades and weld-in blade pockets are easy to replace and reduce maintenance

Heavy-duty pivot design with recessed end caps provides structural strength and long-term durability

One-piece bolt-on tooth bed and bottom wear pad protect parent material, are quick and easy to replace, and minimize build-up and hard-surfacing

Large jaw opening readily pulverizes thick concrete

Unique bolt-on wear parts quickly separate rebar from concrete

GCP APPLICATIONS

- Concrete Recycling
- Demolition

Model	Weight*	Jaw Opening	Jaw Depth	Jaw Width	Reach**	Minimum Excavator Wt.
	(lbs.)	(ins.)	(ins.)	(ins.)	(ft. ins.)	Stick Mount (lbs.)
GCP 410	4,650	34	29	20	6' 9"	45,000
GCP 410R	6,650	34	29	20	7' 9"	55,000
GCP 510	8,000	41	34.5	28	9' 4"	70,000
GCP 510R	9,700	41	34.5	28	10' 8"	90,000
GCP 610	10,950	49	40	30	10' 7"	90,000
GCP 610R	11,900	49	40	30	11' 9"	100,000

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.

GCC

CONCRETE CRACKER



Common pivot group and pinning points accommodate the GCC with one stiff arm—the mounting pad remains in place

Shrouded heavy-duty pivot design provides structural strength and long-term durability

Blade profile focuses force for optimal concrete processing and rebar cutting

Bolt-on wear parts can be rotated, maximizing blade life and minimizing downtime

Extended chin blade aids in positioning concrete for processing

POWER Series

GCC APPLICATIONS

- ▶ Scrap Processing
- ▶ Demolition
- ▶ C & D Processing
- ▶ Concrete Recycling

STIFF ARM AND MOUNTING PAD

Comes standard with each GCC



Model	Weight*	Jaw Opening**	Excavator Weight
	(lbs.)	(ins.)	(lbs.)
GCC 50	4,400	29	40,000 - 60,000
GCC 70	4,990	32	60,000 - 80,000
GCC 90	5,170	36	80,000 - 110,000

*Weight includes mounting bracket and stiff arm.

**Jaw opening varies slightly depending on excavator mounting location.

Genesis linkage attachments are not compatible with quick couplers. Contact Genesis for more information.

GSG

SCRAP GRAPPLE

High-torque continuous
360° rotation for handling
large and uneven loads

Heavy-duty guarding system
completely protects cylinders and
internal components, removes easily
for internal maintenance access

Large bore hydraulic
cylinders maximize
clamping force




Long-life, abrasion-
resistant steel tips are
easily replaced with
simple perimeter weld

Large diameter
hardened steel pins with
integrated shear-proof
pin retainers

All tine styles feature
fully boxed construction
for strength and
durability

GSG APPLICATIONS

- ▶ Scrap Handling
- ▶ C & D Sorting
- ▶ Bulk Material Handling




TINE CONFIGURATIONS

Flat tine models
50-125 available
with wide spades

Point tine available with
medium spades only

Flat tine models 50-250
available with medium
spades



Model	DIAGRAM DIMENSION			A		B		C		D		E	
	Capacity (yd³)	Weight** (lbs.)	Min. Machine Size (mt)	Jaw Open Width (ins.)		Jaw Open Height (ins.)		Jaw Closed Width (ins.)		Jaw Closed Height (ins.)		Footprint (ins.)	
				Flat Tine	Point Tine	Flat Tine	Point Tine	Flat Tine	Point Tine	Flat Tine	Point Tine	Flat Tine	Point Tine
GSG 50	0.50	3,050	20	***	64	***	81	***	52	***	88	***	60
GSG 65	0.65	3,150	20	***	69	***	83	***	54	***	91	***	64
GSG 75	0.75	3,250	20	74	76	***	85	***	59	91	95	***	70
GSG 100	1	3,500	22	79	80	***	90	***	68	93	100	***	73
GSG 100 HD*	1	4,300	25	78	79	77	86	66	63	91	98	71	72
GSG 125	1.25	3,600	22	89	86	***	92	***	71	98	101	***	79
GSG 125 HD*	1.25	4,500	27	85	86	79	88	71	67	95	102	77	78
GSG 150	1.5	4,800	30	91	89	81	94	75	72	100	108	80	81
GSG 200	2	5,000	40	96	95	82	96	78	76	103	112	84	86
GSG 250	2.5	5,700	45	108	105	84	100	86	85	109	118	94	95


*Heavy-duty

**Weight includes yoke.

***Contact your local Genesis Regional Manager for additional information.


GHG

HANDLING GRAPPLE

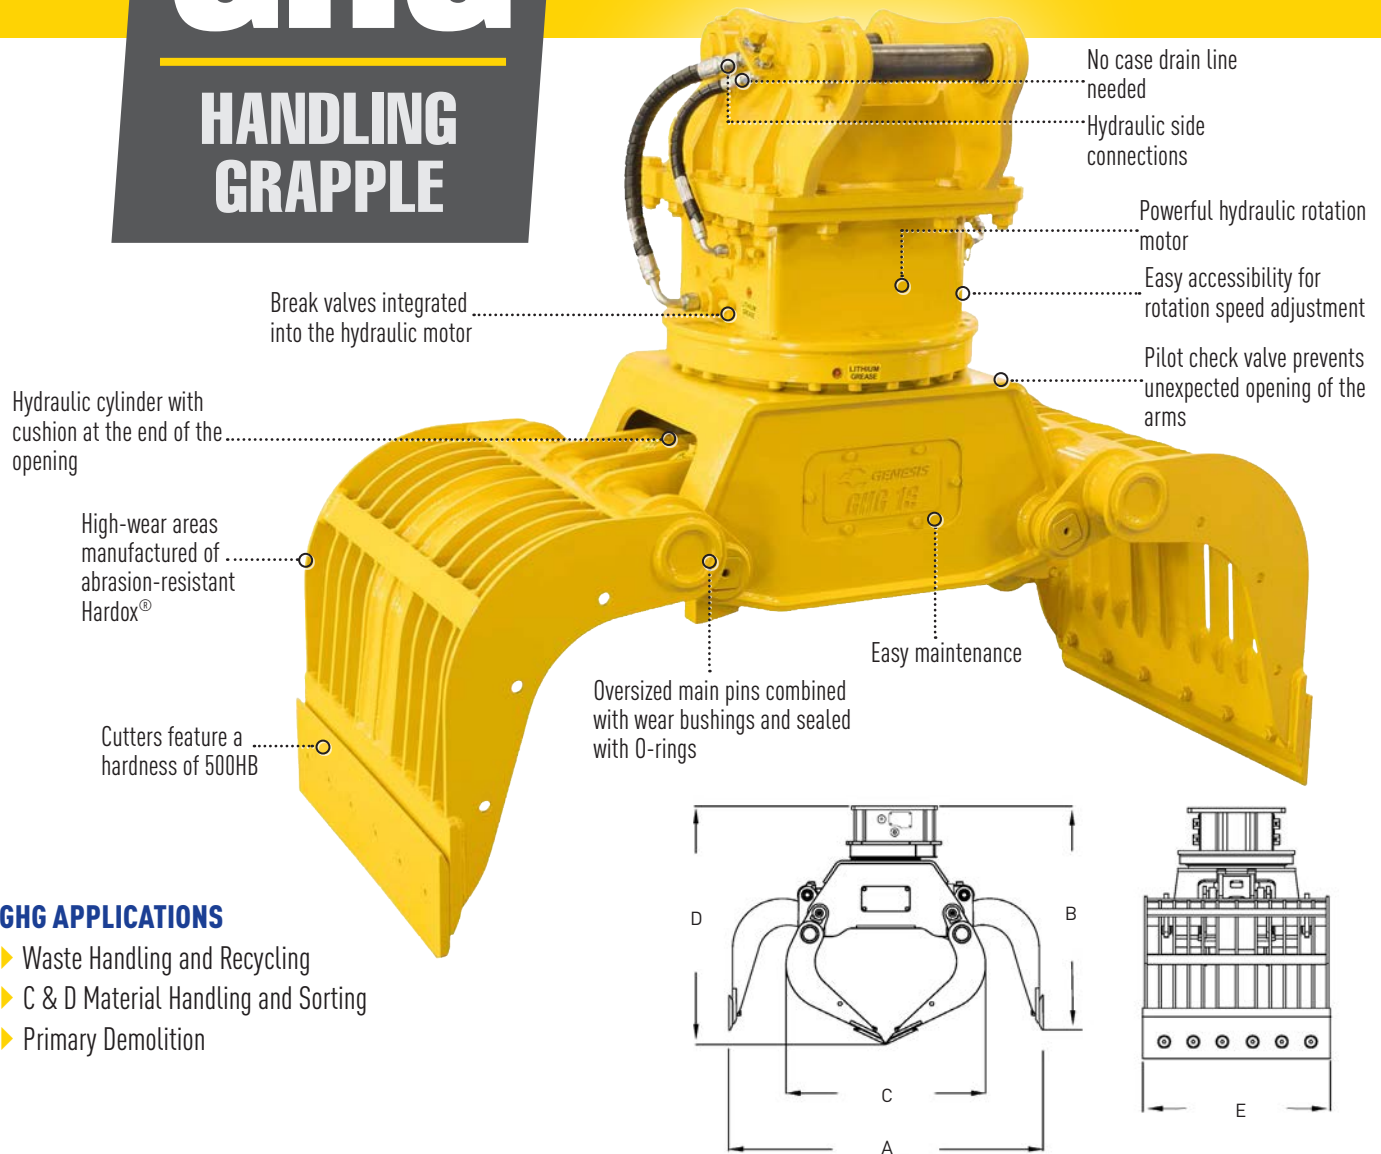

GHG APPLICATIONS

- ▶ Waste Handling and Recycling
- ▶ C & D Material Handling and Sorting
- ▶ Primary Demolition

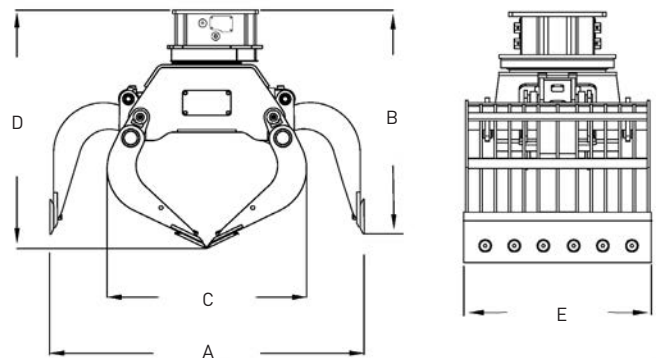


Model	DIAGRAM DIMENSION		A	B	C	D	E	Minimum Machine Size
	Capacity	Weight	Jaw Open Width	Jaw Open Height	Jaw Closed Width	Jaw Closed Height	Tine Width Footprint	
	(yd³)	(lbs.)	(ins.)	(ins.)	(ins.)	(ins.)	(ins.)	(lbs.)
GHG 4	0.12	380	45	33	28	35.5	18	5,500 - 9,000
GHG 6	0.2	640	53	41	34	44	20	9,000 - 13,000
GHG 9	0.24	990	64	43	39	47	23	11,000 - 20,000
GHG 14	0.4	1,415	71	46	44.5	52	28	15,000 - 31,000
GHG 16	0.6	1,930	73	49	48	54	34	22,000 - 35,000
GHG 20	0.65	2,755	81	51	52	57	37	31,000 - 44,000
GHG 25	0.8	3,200	85	52	52	59	44	35,000 - 57,000
GHG 30	1.0	4,080	95	57	62	65	44	40,000 - 66,000
GHG 40	1.2	4,520	95	59	62	65	54	55,000 - 88,000
GHG 50	1.4	5,510	96	61	66	65	57	77,000 - 110,000

Hardox® is a trademark of the SSAB group of companies.

GSD

SEVERE-DUTY GRAPPLE

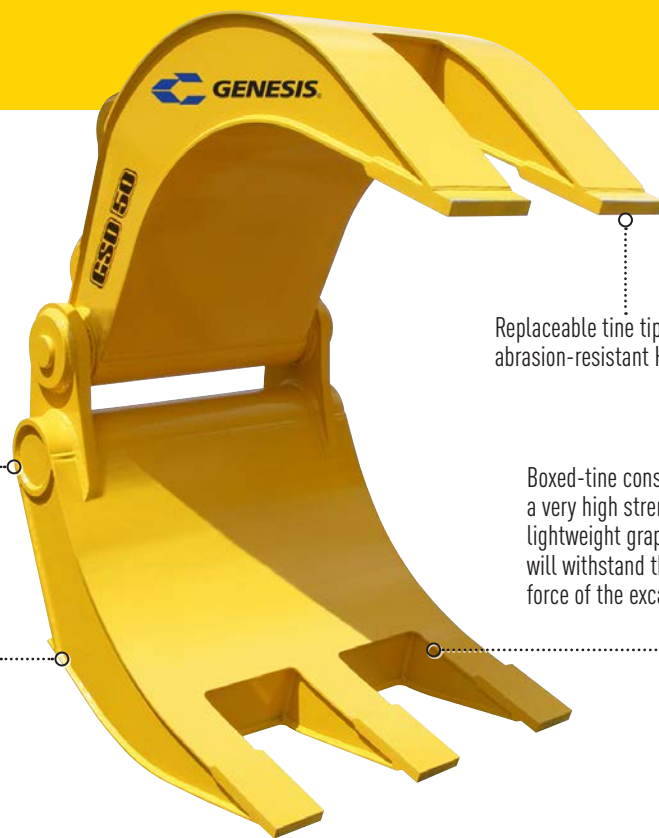

Patented pivot group features a large pivot shaft, and bearings provide long-term durability

Recessed welds are protected from wear, increasing grapple life

Replaceable tine tips are abrasion-resistant Hardox® steel

Boxed-tine construction creates a very high strength and lightweight grapple — each tine will withstand the full breakout force of the excavator

GSD APPLICATIONS

- ▶ Demolition
- ▶ Scrap Handling & Compaction
- ▶ Rip-rap Handling
- ▶ Road Building & Reconstruction
- ▶ C & D Sorting
- ▶ Land Clearing



STIFF ARM AND MOUNTING PAD

Comes standard with each GSD



Model	Weight*	Capacity	Jaw Opening**	Jaw Closed	Moveable Jaw Width	Lower Jaw Width	Excavator Weight
	(lbs.)	(yd³)	(ins.)	(ins.)	(ins.)	(ins.)	(lbs.)
GSD 10	555	0.5 - 0.8	64	7	13	22	10,000 - 20,000
GSD 30	2,110	1.5 - 2.5	84	8	21	35	24,000 - 30,000
GSD 40	2,620	2.0 - 3.0	92	9	26	38	30,000 - 40,000
GSD 50	3,300	3.0 - 4.0	99	10	30	44	35,000 - 65,000
GSD 70	4,430	3.5 - 4.5	121	12	30	44	65,000 - 85,000
GSD 90	5,950	4.5 - 6.5	131	12	34	50	85,000 - 120,000
GSD 140	7,500	6.5 - 7.5	140	15	34	50	120,000 - 170,000
GSD 170	9,600	7.5 - 10.0	150	16	40	58	170,000 - 220,000
GSD 250	16,500	8.5 - 12.0	150	16	40	68	220,000 - 280,000

*Weight includes mounting bracket and stiff arm.

**Jaw opening varies slightly depending on excavator mounting location.

Hardox® is a trademark of the SSAB group of companies.

TECHNICAL SERVICE TRAINING

Procedures. Products. People.



**Train with the best in the business.
Maximize your productivity and the value
of your attachments.**

Designed for Genesis customer and dealer service supervisors and technicians, Technical Service Training provides attendees the maintenance, repair and troubleshooting procedures recommended for their attachments.

Held in Superior, WI, the two-day sessions feature not only classroom learning but also a Genesis factory tour, enabling attendees to see first-hand how attachments are built and meet the people who build them. Instructional topics include installation, operation, welding, hydraulics, rotation and swivels.

Classes are typically held April through October, and there is no cost to attend. Attendees are responsible for only their airfare or ground transportation. Genesis covers all other training related expenses.

Class size is limited, so early registration is recommended. However, if there is a large number of people from one organization who want to attend, we may be able to come to you. Customer and dealer on-site training should be discussed and planned with your Genesis Regional Manager.

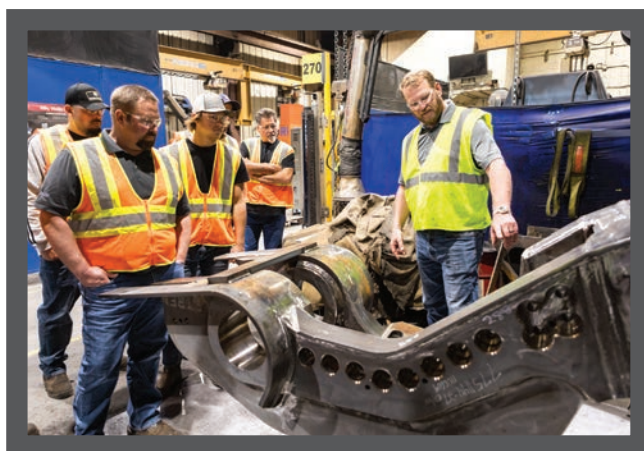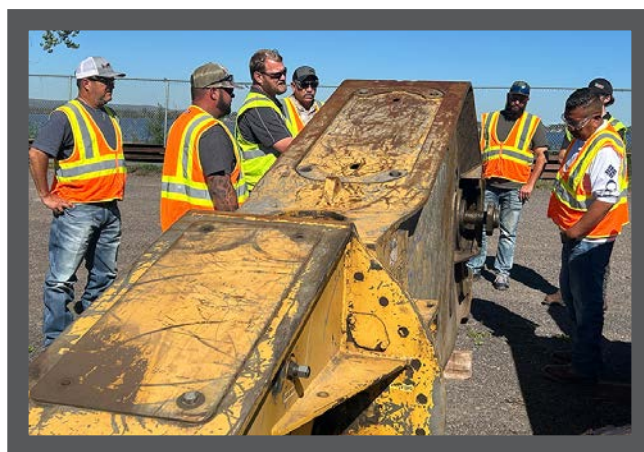

► See genesishattachments.com/support/technical-service-training for class dates, registration and complete information.

GENESIS OEM PARTS

Only Genesis Wear Parts provide:

- ▶ Engineered performance
- ▶ Precise OEM fit
- ▶ Extended life



We know attachments are used in the most extreme conditions, and when steel cuts steel or crushes concrete, blades, teeth and other components are going to wear and need to be replaced.

To keep you operating, Genesis offers a complete selection of individual wear parts and wear parts kits for blades and teeth, as well as hydraulic components and maintenance tools and supplies.

MOBILE SHEAR BLADES AND WEAR PARTS KITS

MAXX^{NiFe}

Genesis offers a wide range of premium mobile shear blades for all applications. Maxx-NiFe® high-nickel blades for extreme duty and longer life. Standard blades for typical scrap processing, and serrated blades for a variety of applications including rebar processing and cutting cable.



DEMOLITION TOOL & PROCESSOR TEETH AND WEAR PARTS KITS

We stock an extensive inventory of individual blades, teeth, shims, bolts, nuts and washers in addition to complete wear parts kits for all Genesis demolition and processing attachments.



HYDRAULICS

We have a complete inventory of the highest-grade hydraulic components for all Genesis attachments including swivels, motors, gearboxes, regeneration valves, cartridges, valves, seal kits and hoses.



MAINTENANCE

Genesis has the tools and supplies you need to keep your attachment running — demolition tooth build-up templates, Genrod and Genwire welding supplies, torque wrenches, torque multipliers, sockets, GLG-2® extreme-pressure grease, grinders and other hand tools.



REBUILD SERVICES

Repair. Restore. Rebuild.

Genesis offers complete refurbishment, repair and restoration services that extend attachment life and your return on investment.

EXTEND THE SERVICE LIFE OF YOUR ATTACHMENT

When purchasing a new attachment isn't necessary or even an option, turn to Genesis Rebuild Services. We will extend the life of your worn out attachments by bringing them back to factory specs.

Genesis has quickly repaired and rebuilt hundreds of attachments. And every rebuilt Genesis attachment features a six-month warranty on all repairs.

Contact your Genesis Regional Manager for additional Rebuild Services information or visit genesissattachments.com



REBUILD COMPONENTS INCLUDE:

- ▶ Upper and lower jaws
- ▶ Main shaft
- ▶ Cylinder
- ▶ Brackets
- ▶ Parent material that no longer supports the blades
- ▶ Upper and lower jaw knife edges that no longer run parallel

SHEAR JAW ARMOR®

Tough. Long-lasting. Reliable.



Attachments protected with Genesis Shear Jaw Armor® and Grapple Jaw Armor not only deliver productivity, uptime and value, but also far exceed normal wear cycles.

Constructed from our proprietary GenGuard steel, the Jaw Armor abrasion-resistant system maintains structural integrity and reduces build-up and hard-surfacing downtime.

- ▶ Reduces downtime and welding maintenance expense
- ▶ Virtually eliminates build-up and hard-surfacing
- ▶ Does not affect shear blade mounting
- ▶ Available on new and for existing attachments



MANUFACTURING




The people and technology behind our Promise of Performance

Making industry-leading attachments that withstand the daily rigors of demolition, scrap processing and material handling applications requires not only the most rugged materials and components, but also highly skilled people and the latest manufacturing technology.

Genesis engineers, welders, machinists and assemblers have years of attachment manufacturing experience and strive to produce only the highest quality shears, processors and grapples.

Our investments in automation, machining and welding equipment, and factory upgrades facilitate accuracy and efficiency as well as promote continuous improvement.

Thanks to our people and technology, Genesis attachments are industry workhorses designed to improve our customers' productivity and profitability for many years. That's our Promise of Performance.

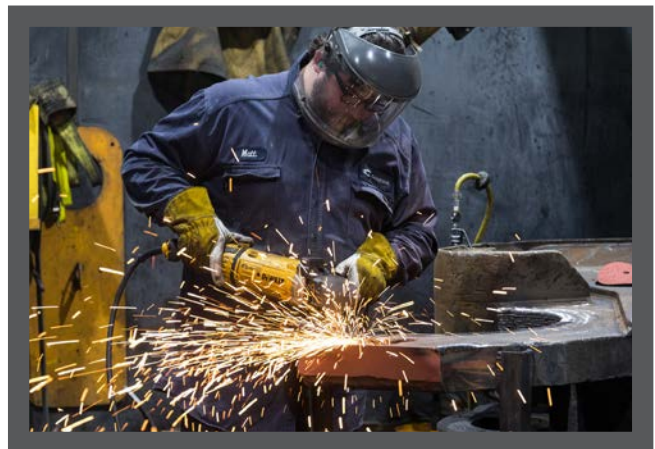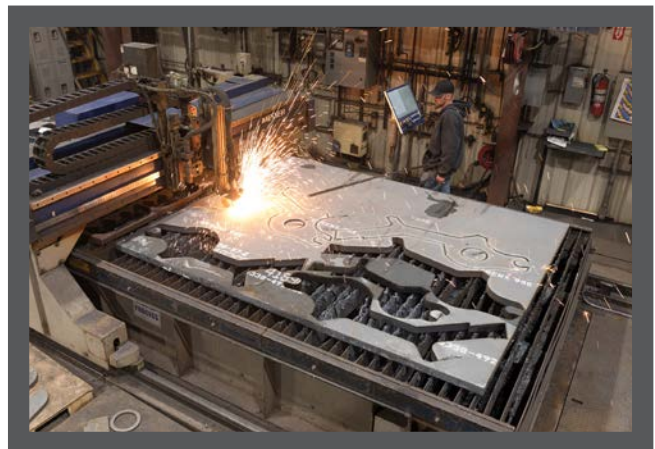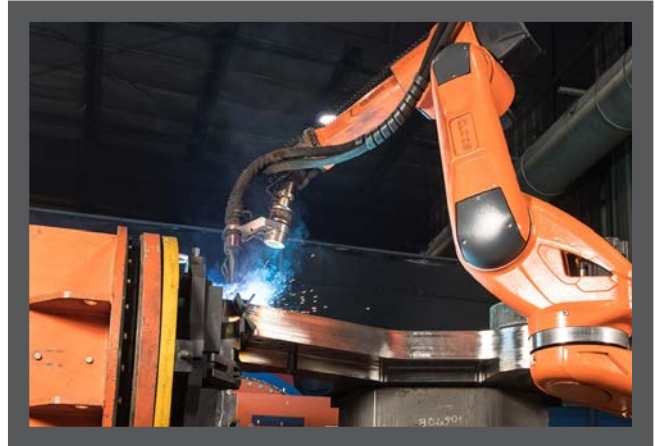

Most Genesis attachments are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance. Patents: genesisattachments.com/products/patents


MULTI-MACHINE MOUNTING

Brackets & Rotator Mounting Positions




Genesis offers a variety of mounting brackets to meet your application needs. All mounting brackets can be built to OEM spec, multi-machine and/or transport configuration.


Second-Member



Standard




Flat Top




Bracket Adapter
For use with third-member
standard bracket

Third-Member





Standard



Flat Top

Second-Member Standard versus Transport Configuration

Transport bracket designs allow for ease of mobility or maintenance without having to unpin the stick cylinder. Consult your Genesis Regional Manager for more information.

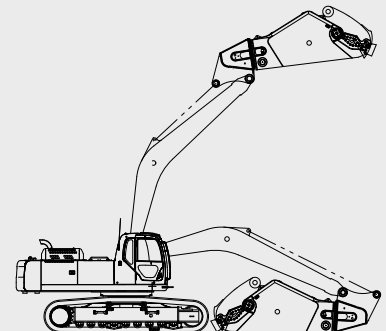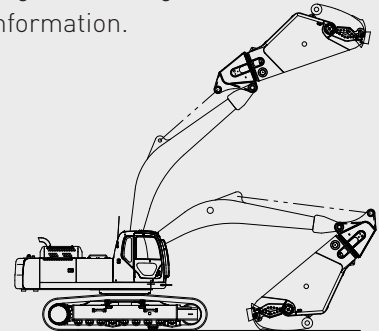

FIND YOUR LOCAL GENESIS DEALER

VISIT THE DEALER LOCATOR AT GENESISATTACHMENTS.COM

SEARCH FOR DEALERS

Select a State or Province Zip Code

SEARCH

Select a state/province or enter a zip code.

REGIONAL SALES MANAGERS

Our experienced sales team has the application and product knowledge to help you select the best tool for your job.

[Find Your Regional Manager](#)

INTERNATIONAL DEALERS

Genesis mobile shears, concrete processors, grapples and specialty attachments are available around the world through our global dealer network.

[International Dealer Search](#)

Genesis Attachments

1000 Genesis Drive
Superior, WI 54880 USA

Toll Free: 888-SHEAR-IT
(888-743-2748)
Phone: 715-395-5252
info@genesisattachments.com

Europe/Africa/Middle East

Genesis GmbH
Teramostrasse 23
87700 Memmingen, Germany

Phone: +49 83 31 9 25 98 0
Fax: +49 83 31 9 25 98 80
genesis-europe.com
info@genesis-europe.com

Asia Pacific Representative Office

24 Upper Serangoon View #12-28
Singapore 534205

Phone: +65 9673 9730
tchoo@genesisattachments.com



The Genesis Product Catalog is published by Genesis Attachments, 1000 Genesis Drive, Superior, WI 54880. Extracts from this literature may be copied or reproduced only with prior approval from the Genesis Marketing Department and if the originator is credited. Genesis' policy is to continually develop and improve products. The Company reserves the right to change product detail and technical specifications without notice.