


# Linkage Shear (GLS) **POWER**Series

## FEATURES

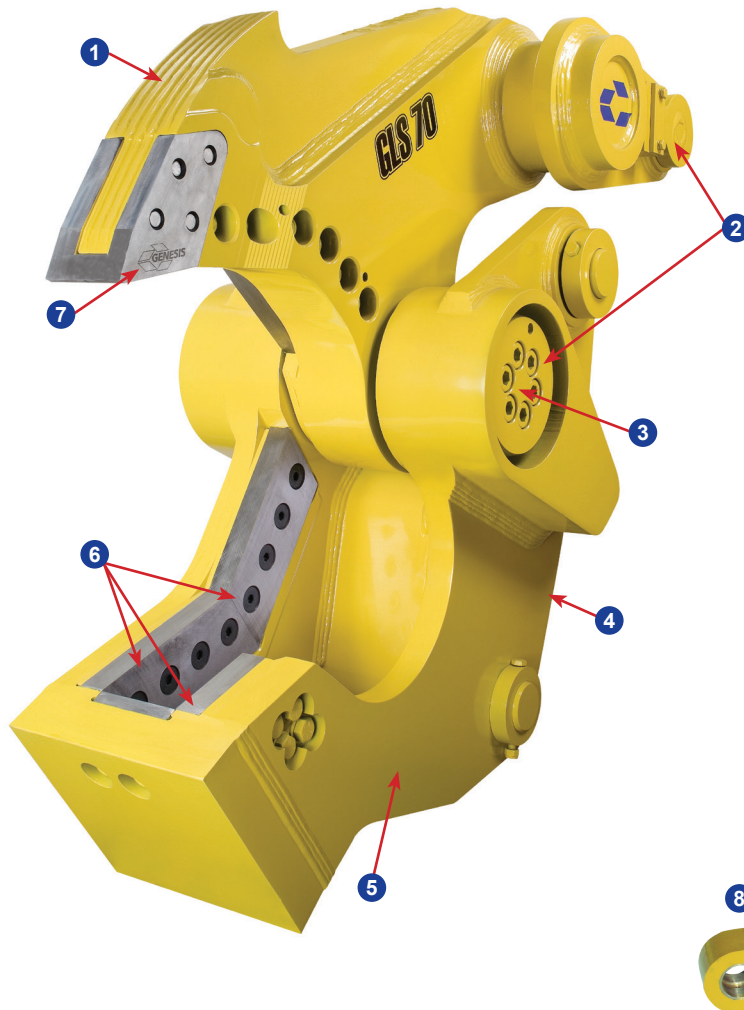

- 1 "Rhino horn" aids in positioning material for processing
- 2 Common pivot group and pinning points accommodate the full line of Power Series linkage tools with one stiff arm - the mounting pad remains in place
- 3 Shrouded heavy-duty pivot design provides structural strength and long-term durability
- 4 The GLS stands upright for easy attachment changes and convenient storage and transport
- 5 Built with Strenx™ steel for the best combination of structural strength and wear durability
- 6 Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges
- 7 Patented bolt-on piercing tip is replaced in minutes without grinding or welding
- 8 Stiff arm and mounting pad included

## APPLICATIONS

- Scrap Processing
- Demolition
- C&D Processing
- Concrete Recycling



Model	Weight*	Jaw Opening**	Jaw Depth	Excavator Weight
	(lbs.)	(ins.)	(ins.)	(lbs.)
GLS 50	4,100	21	21	40,000 - 60,000
GLS 70	4,696	24	24	60,000 - 80,000
GLS 90	5,313	27	27	80,000 - 110,000

\*Weight includes mounting bracket and stiff arm.

\*\*Jaw opening varies slightly depending on excavator mounting location.

Genesis linkage attachments are not compatible with quick couplers. Contact Genesis for more information.

All Genesis Linkage Shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty.

Genesis reserves the right to continually make product improvements designed to positively enhance performance.

Strenx™ is a trademark of SSAB.

Patents: [genesisattachments.com/patents](http://genesisattachments.com/patents)