


# Linkage Shear (GLS) **POWER**Series

## FEATURES

- 1 “Rhino horn” aids in positioning material for processing
- 2 Common pivot group and pinning points accommodate the full line of Power Series linkage tools with one stiff arm - the mounting pad remains in place
- 3 Shrouded heavy-duty pivot design provides structural strength and long-term durability
- 4 The GLS stands upright for easy attachment changes and convenient storage and transport
- 5 Built with Strenx™ steel for the best combination of structural strength and wear durability
- 6 Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges
- 7 Patented bolt-on piercing tip is replaced in minutes without grinding or welding
- 8 Stiff arm and mounting pad included

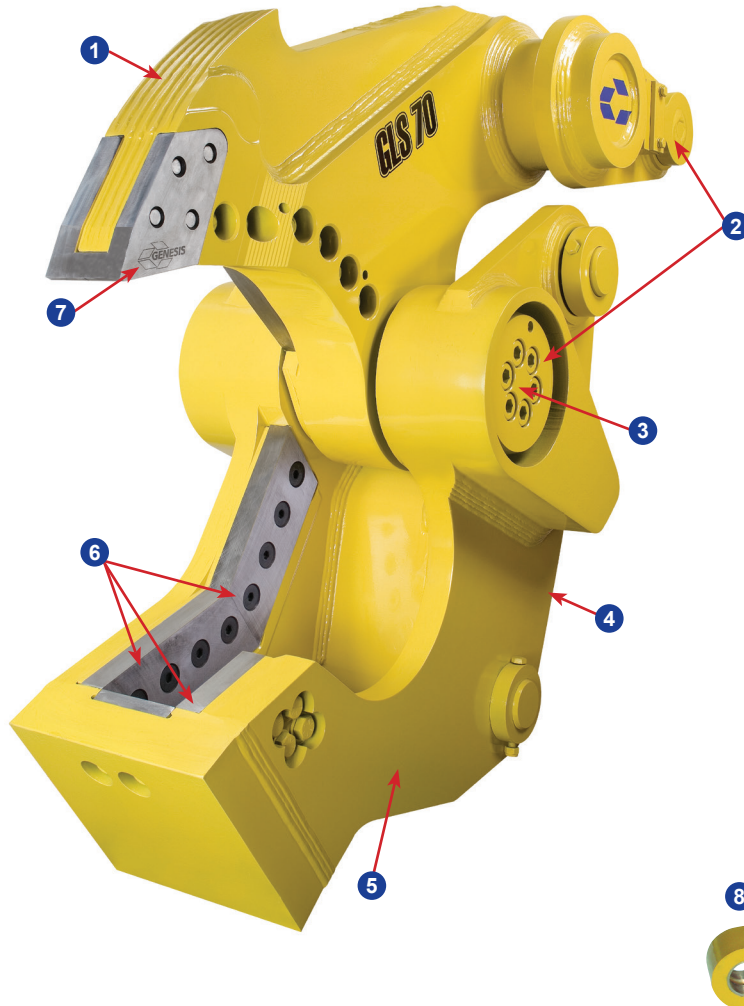

## APPLICATIONS

- Scrap Processing
- Demolition
- C&D Processing
- Concrete Recycling

## Metric Specs:

Model	Weight*	Jaw Opening**	Jaw Depth	Excavator Weight
	(kg)	(mm)	(mm)	(mt)
GLS 50	1,860	533	533	18 - 27
GLS 70	2,130	610	610	27 - 36
GLS 90	2,410	686	686	36 - 49

\*Weight includes mounting bracket and stiff arm.

\*\*Jaw opening varies slightly depending on excavator mounting location.

Genesis linkage attachments are not compatible with quick couplers. Contact Genesis for more information.

All Genesis Linkage Shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty.

Genesis reserves the right to continually make product improvements designed to positively enhance performance.

Strenx™ is a trademark of SSAB.

Patents: [genesisattachments.com/patents](http://genesisattachments.com/patents)