



Multi-Jaw Demolition Tool (GRX)

FEATURES

- 1 Hydraulic pin engagement and removal for jaw change-outs in less than 2 minutes without leaving the cab
 - 2 Heavy-duty pivot design is integral to the jaw set, providing a power curve to match the jaw's primary application
 - 3 Reverse-mounted cylinder protects the rod from debris
 - 4 Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
 - 5 Short, flat-top head with bolt-on bracket shortens the center of gravity, making it easy to change mounting for different carriers
 - 6 Jaw stands are specific to each jaw set, providing correct positioning for efficient change-outs
- Shear Jaw**
- 7 Bolt-on piercing tip encapsulates front of upper jaw, minimizing risk of damage and reducing maintenance
 - 8 Dual guide blade length matches piercing tip length so blades can be shimmed independently to accommodate piercing tip wear
 - 9 Weld-on, replaceable, highly abrasion-resistant steel rhino horn protects front of upper jaw, reducing maintenance
- Cracker Jaw**
- 10 Low-cost, reversible, long-life crushing teeth are quickly and easily replaced, eliminating build-up
 - 11 4-way indexable cutting blades feature an apex that draws material deeper into the jaw for more efficient cutting
 - 12 Easy-to-change crushing teeth are available in several configurations to maximize performance in any application

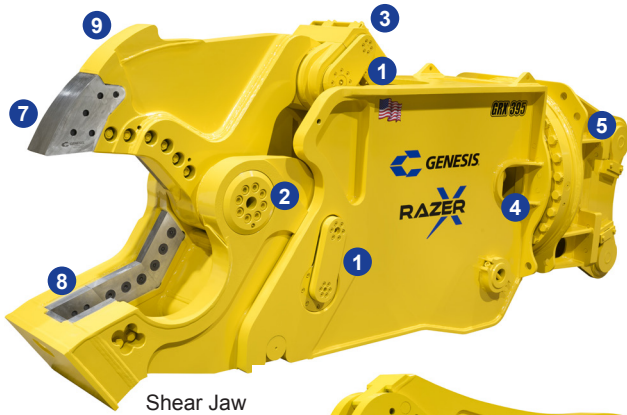

Shear Jaw

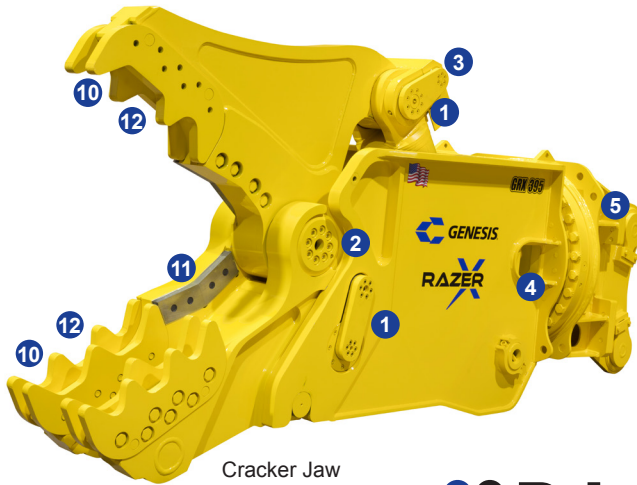

Cracker Jaw

APPLICATIONS

- Concrete Recycling
- C & D Processing
- Bridge Demolition
- Wire
- Copper
- Structural Steel
- Demolition
- Rebar
- Aluminum



Shear Jaw Stand

Metric Specs

Model	Jaw	Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Weight
		(kg)	(mm)	(mm)	(mm)	Stick Mount (mt)
GRX 395	Cracker	4,876	1,143	1,067	3,200	41
GRX 395	Shear	4,763	610	648	3,200	41
GRX 395	Pulverizer	4,990	1,143	914	3,200	41

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.

All Genesis GRX Razer tools are covered by a 12-month, 1,500-hour (whichever occurs first) warranty.

Genesis reserves the right to continually make product improvements designed to positively enhance performance.

Patents: genesisattachments.com/products/patents