


# Subsea Shear (GSS)

## FEATURES

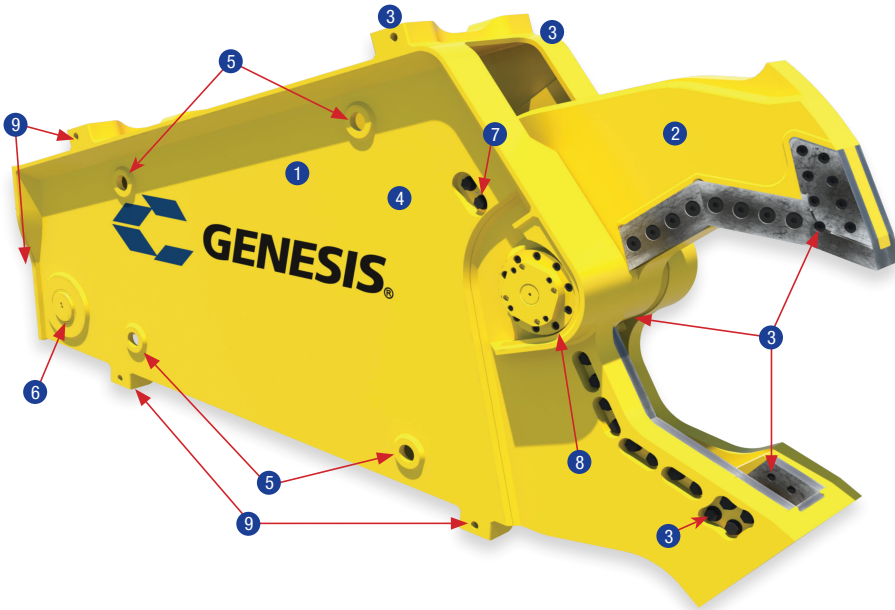

- 1 Pressure tested to operate at depths down to 10,000 feet (3048 m)
- 2 Anti-corrosion primer and paint for supreme protection in harsh marine environments
- 3 Xylan<sup>®</sup> anti-corrosion coated fasteners and critical surfaces
- 4 Zinc anodes for galvanic corrosion protection
- 5 Holes for easy draining and flushing
- 6 Sealed, greaseable pivot points
- 7 Exclusive easy to shim AutoGuide system helps maintain blade tolerances by off-setting jaw deflection
- 8 Heavy-duty pivot design protected by an anti-corrosion coating provides structural strength and long-term durability
- 9 Multi-position rigging to hang and operate while suspended by a cable crane

### APPLICATIONS

- Offshore Platform Decommissioning
- Offshore Pipeline and Piling Cutting
- Underwater Steel Cutting
- Cable Hung - Operated by Subsea Power Pack or from Surface Power

### Metric Specs:

Model Number	Weight	Jaw Opening	Jaw Depth
	(kg)	(mm)	(mm)
<b>GSS 660</b>	6,033	813	813
<b>GSS 2500</b>	18,597	1,168	1,219

Genesis GSS shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance. Patents: [genesisattachments.com/patents](http://genesisattachments.com/patents)

Xylan is a registered trademark of Whitford Corporation.