


Subsea Shear (GSS)

FEATURES

- 1 Pressure tested to operate at depths down to 10,000 feet
- 2 Anti-corrosion primer and paint for supreme protection in harsh marine environments
- 3 EcoGuard anti-corrosion coated fasteners and critical surfaces
- 4 Zinc anodes for galvanic corrosion protection
- 5 Drain holes in the side and bottom plates
- 6 Additional bearings and grease points at the cylinder ends simplify maintenance and disassembly
- 7 Exclusive easy to shim AutoGuide system helps maintain blade tolerances by off-setting jaw deflection
- 8 Heavy-duty pivot design protected by an anti-corrosion coating provides structural strength and long-term durability
- 9 Multi-position rigging to hang and operate while suspended by a cable crane

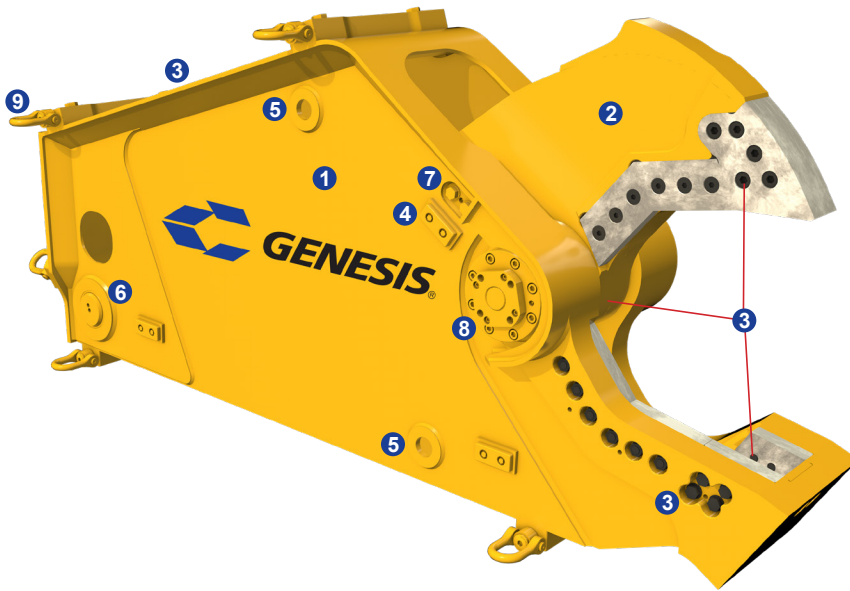

APPLICATIONS

- Offshore Platform Decommissioning
- Offshore Pipeline and Piling Cutting
- Underwater Steel Cutting
- Cable Hung - Operated by Subsea Power Pack or from Surface Power

Metric Specs:

Model	Weight (kg)	Jaw Opening (mm)	Jaw Depth (mm)
GSS 665	5,579	813	813
GSS 775	6,668	889	940
GSS 2555	20,865	1,372	1,422

Genesis GSS shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance. Patents: genesisattachments.com/patents