
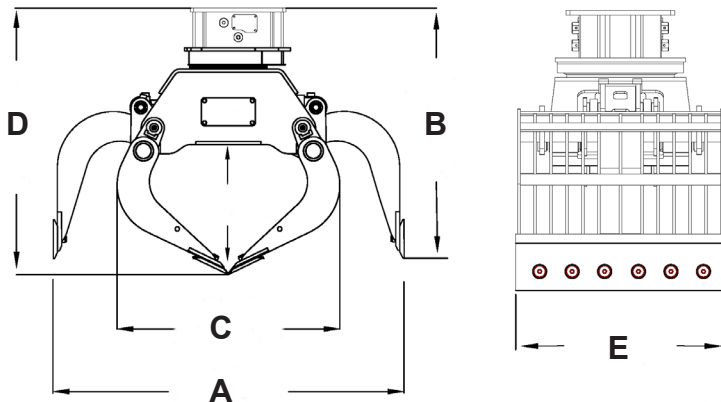


Handling Grapple (GHG)

FEATURES

- 1 Oversized main pins combined with wear bushings and sealed with O-rings
- 2 Powerful hydraulic rotation motor
- 3 No case drain line needed
- 4 Hydraulic cylinder with cushion at the end of the opening
- 5 Hydraulic side connections
- 6 Easy maintenance
- 7 Easy accessibility for rotation speed adjustment
- 8 Pilot check valve prevents unexpected opening of the arms
- 9 High-wear areas manufactured of abrasion-resistant Hardox®
- 10 Cutters feature a hardness of 500HB
- 11 Break valves integrated into the hydraulic motor

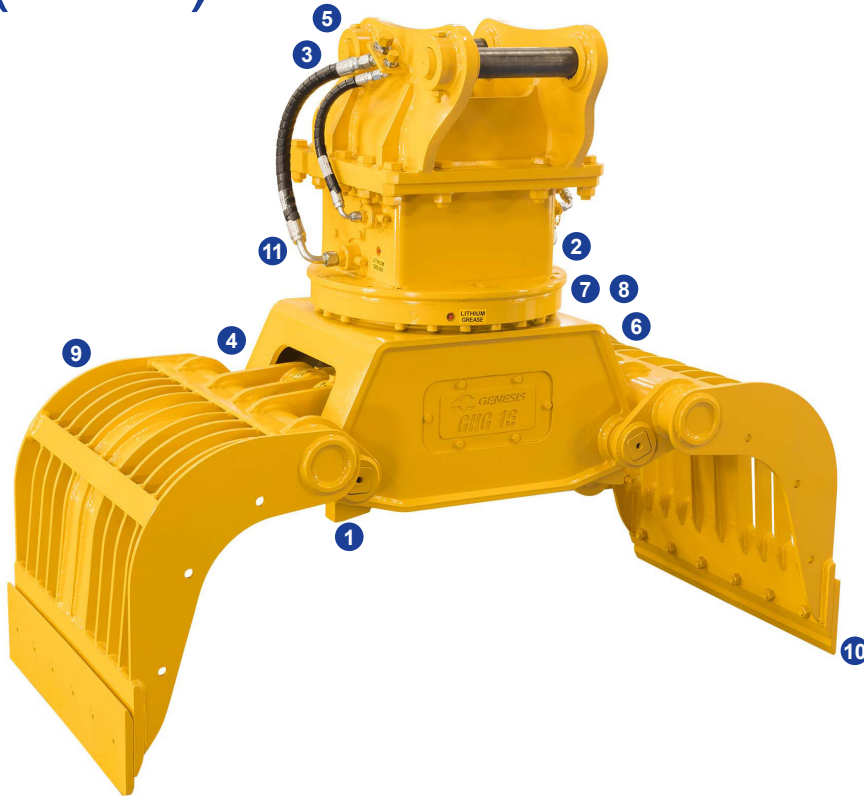

APPLICATIONS

- Waste Handling and Recycling
- C & D Material Handling and Sorting
- Primary Demolition

Model	Capacity (yd ³)	Weight (lbs.)	Jaw Open Width (A) (ins.)	Jaw Open Height (B) (ins.)	Jaw Closed Width (C) (ins.)	Jaw Closed Height (D) (ins.)	Tine Width Footprint (E) (ins.)	Min. Machine Size (mt)
GHG 16	0.6	1,929	73	49	48	54	34	10 - 16
GHG 20	0.65	2,712	81	51	52	57	37	14 - 20
GHG 25	0.8	3,197	85	52	52	59	44	16 - 26
GHG 30	1.0	4,079	95	58	62	65	44	18 - 30
GHG 40	1.2	4,519	95	58	62	65	54	25 - 40
GHG 50	1.4	5,512	96	61	66	65	57	35 - 50

Genesis Handling Grapples are covered by a 12-month, 1,500-hour (whichever occurs first) warranty.
 Patents: genesisattachments.com/products/patents
 Hardox is a trademark of the SSAB group of companies.