
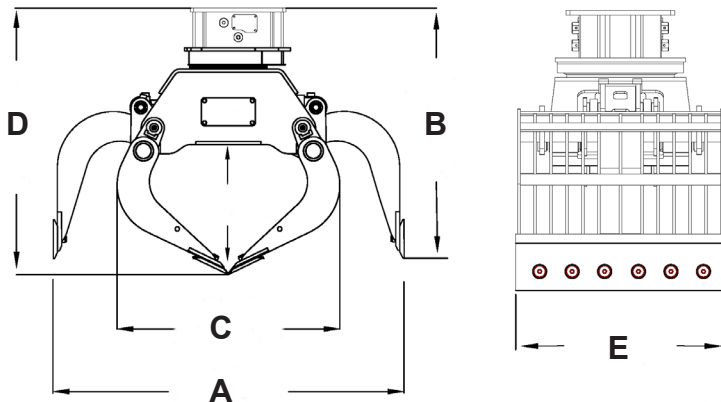


Handling Grapple (GHG)

FEATURES

- 1 Oversized main pins combined with wear bushings and sealed with O-rings
- 2 Powerful hydraulic rotation motor - models GHG 20 and larger feature dual high-torque motors
- 3 No case drain line needed
- 4 Hydraulically cushioned cylinder
- 5 Hydraulic side connections
- 6 Easy maintenance
- 7 Easy accessibility for rotation speed adjustment
- 8 Pilot check valve prevents unexpected opening of the arms
- 9 High-wear areas manufactured of abrasion-resistant Hardox®
- 10 Cutters feature a hardness of 500HB
- 11 Break valves integrated into the hydraulic motor

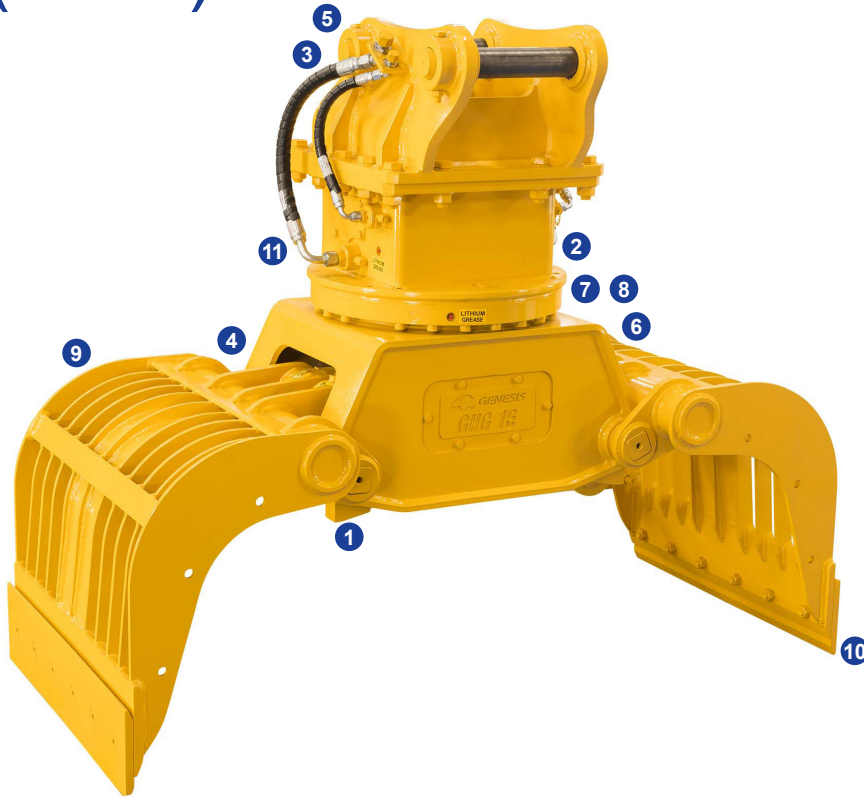

APPLICATIONS

- Waste Handling and Recycling
- C & D Material Handling and Sorting
- Primary Demolition

Model	Capacity (yd ³)	Weight (lbs.)	Jaw Open Width (A) (ins.)	Jaw Open Height (B) (ins.)	Jaw Closed Width (C) (ins.)	Jaw Closed Height (D) (ins.)	Tine Width Footprint (E) (ins.)	Min. Machine Size (lbs.)
GHG 16	0.6	1,929	73	49	48	54	34	22,000 - 36,000
GHG 20	0.65	2,712	81	51	52	57	37	30,000 - 44,000
GHG 25	0.8	3,197	85	52	52	59	44	36,000 - 58,000
GHG 30	1.0	4,079	95	58	62	65	44	40,000 - 66,000
GHG 40	1.2	4,519	95	58	62	65	54	56,000 - 88,000
GHG 50	1.4	5,512	96	61	66	65	57	78,000 - 110,000

Genesis Handling Grapples are covered by a 12-month, 1,500-hour (whichever occurs first) warranty.
 Patents: genesisattachments.com/products/patents
 Hardox is a trademark of the SSAB group of companies.