
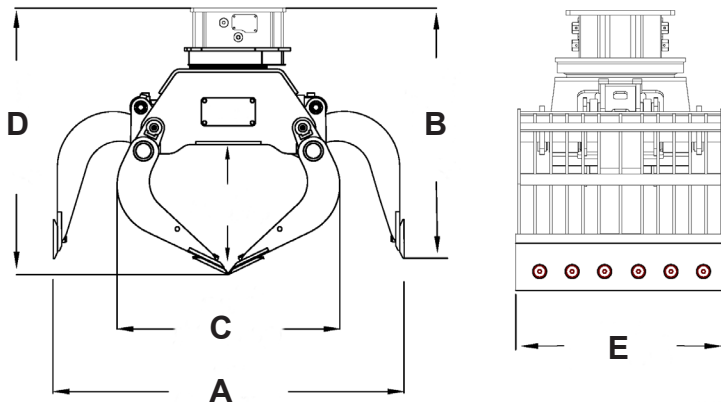


Handling Grapple (GHG)

FEATURES

- 1 Oversized main pins combined with wear bushings and sealed with O-rings
- 2 Powerful hydraulic rotation motor - models GHG 20 and larger feature dual high-torque motors
- 3 No case drain line needed
- 4 Hydraulically cushioned cylinder
- 5 Hydraulic side connections
- 6 Easy maintenance
- 7 Easy accessibility for rotation speed adjustment
- 8 Pilot check valve prevents unexpected opening of the arms
- 9 High-wear areas manufactured of abrasion-resistant Hardox®
- 10 Cutters feature a hardness of 500HB
- 11 Break valves integrated into the hydraulic motor

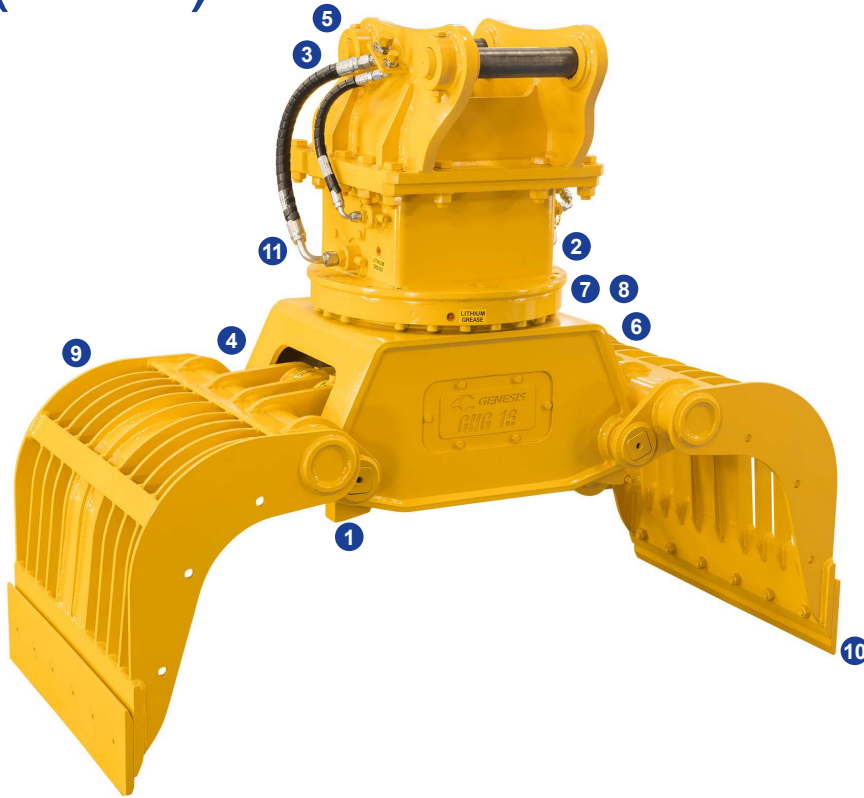

APPLICATIONS

- Waste Handling and Recycling
- C & D Material Handling and Sorting
- Primary Demolition

Model	Capacity (m ³)	Weight (kg)	Jaw Open Width (A) (mm)	Jaw Open Height (B) (mm)	Jaw Closed Width (C) (mm)	Jaw Closed Height (D) (mm)	Tine Width Footprint (E) (mm)	Min. Machine Size (mt)
GHG 16	0.46	875	1,854	1,245	1,219	1,372	864	10 - 16
GHG 20	0.5	1,230	2,057	1,295	1,321	1,448	940	14 - 20
GHG 25	0.6	1,450	2,159	1,321	1,321	1,500	1,118	16 - 26
GHG 30	0.76	1,850	2,413	1,473	1,575	1,651	1,118	18 - 30
GHG 40	0.9	2,050	2,413	1,473	1,575	1,651	1,372	25 - 40
GHG 50	1.1	2,500	2,438	1,549	1,676	1,651	1,448	35 - 50

Genesis Handling Grapples are covered by a 12-month, 1,500-hour (whichever occurs first) warranty.
 Patents: [genesisattachments.com/products/patents](https://www.genesisattachments.com/products/patents)
 Hardox is a trademark of the SSAB group of companies.