




Multi-Jaw Demolition Tool (GRX)

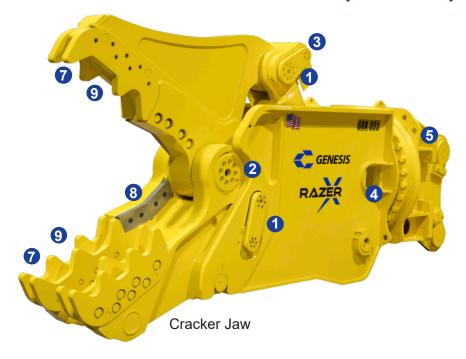

APPLICATIONS

- Concrete Recycling
- C & D Processing
- Bridge Demolition
- Wire
- Copper

- Structural Steel
- Demolition
- Rebar
- Aluminum

FEATURES

- Hydraulic pin engagement and removal for jaw change-outs in less than 2 minutes without leaving the cab
- 2 Heavy-duty pivot design is integral to the jaw set, providing a power curve to match the jaw's primary application
- 3 Reverse-mounted cylinder protects the rod from debris
- Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
- 5 Short, flat-top head with bolt-on bracket shortens the center of gravity, making it easy to change mounting for different
- Jaw stands are specific to each jaw set, providing correct positioning for efficient change-outs

Cracker Jaw

- Reversible, long-life crushing teeth are quickly and easily replaced, eliminating build-up
- 4-way indexable cutting blades feature an apex that draws material deeper into the jaw for more efficient cutting
- Easy-to-change crushing teeth are available in several configurations to maximize performance in any application



Model	Jaw	Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Weight
		(lbs.)	(ins.)	(ins.)	(ft. ins.)	Stick Mount (lbs.)
GRX 195	Cracker	5,500	30	30	8' 9"	45,000
	Shear	5,200	18	18		
	Pulverizer	5,500	29	26		
GRX 295	Cracker	7,100	38	32	9' 4"	66,000
	Shear	6,900	20	20		
	Pulverizer	7,300	38	30		
GRX 395	Cracker	10,750	45	42	10' 6"	90,000
	Shear	10,500	24	25.5		
	Pulverizer	11,000	45	36		

^{*}Weight includes mounting bracket to attach to excavator.

All Genesis GRX Razer X tools are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance. Patents: genesisattachments.com/products/patents



^{**}Distance is measured from the attachment mounting pivot (boom or stick) forward.






Multi-Jaw Demolition Tool (GRX)



FEATURES

Shear Jaw

- Bolt-on piercing tip encapsulates front of upper jaw, minimizing risk of damage and reducing maintenance
- 2 Dual guide blade length matches piercing tip length so blades can be shimmed independently to accommodate piercing
- 3 Weld-on, replaceable, highly abrasion-resistant steel rhino horn protects front of upper jaw, reducing maintenance

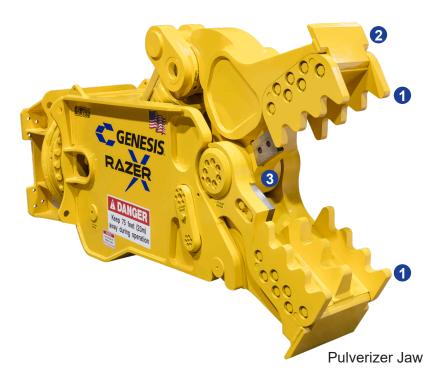

FEATURES

- Pulverizer Jaw
 Reversible, long-life crushing teeth are quickly and easily replaced, eliminating build-up
- 2 Extended wear plates aid in positioning concrete for processing
- 3 Indexable blades provide two usable



1000 Genesis Drive, Superior, WI 54880 888-SHEAR-IT (743-2748) - Tel: 715.395.5252 - genesisattachments.com

